




ISC2-MW Top-Entry Mixer Seal

Proven design provides cost-effective and reliable solution for chemical and pharmaceutical applications

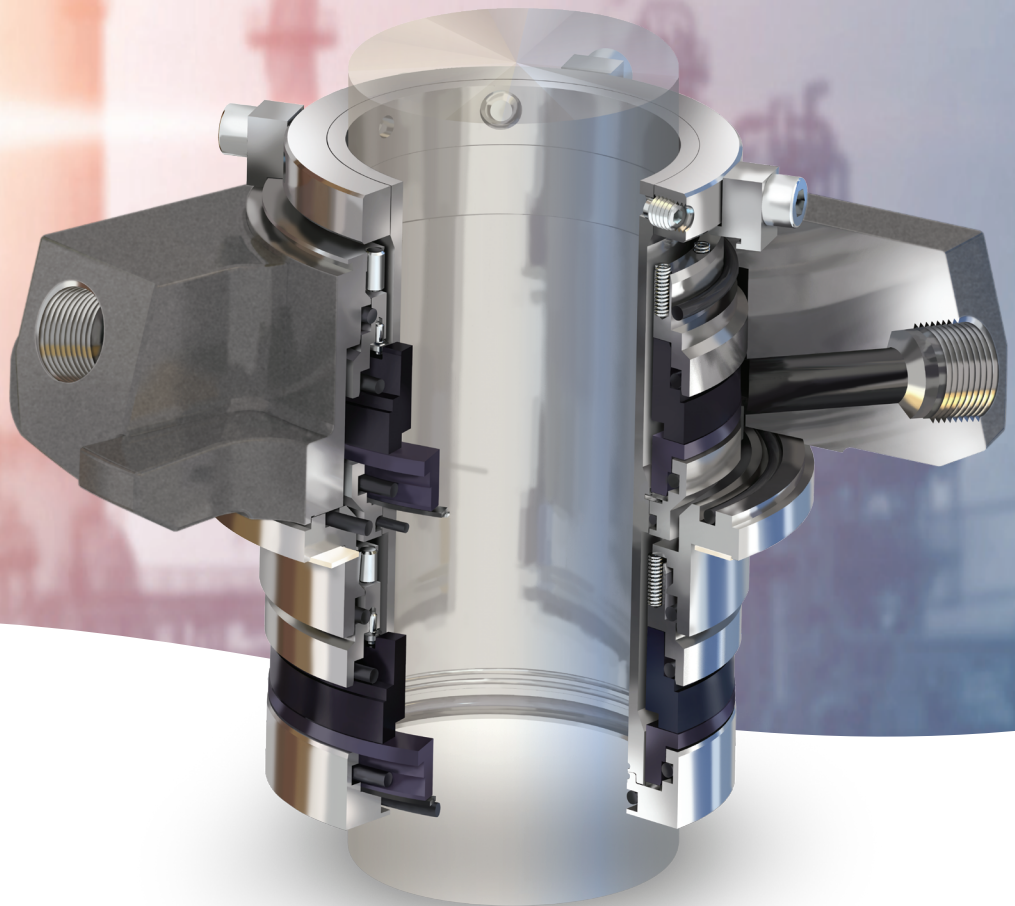

Experience In Motion

A proven and cost-effective mixer seal design

The ISC2-MW mixer seal is a versatile top-entry, liquid-barrier mixer and agitator seal that cost-effectively handles difficult-to-seal chemical and pharmaceutical applications.

Product contamination, high vessel pressures, shaft run-out, spatial limitations, and a broad range of viscosity and emissions control are just a few of the potential issues that need to be met with a reliable mechanical seal. The ISC2-MW mixer seal is built upon Flowserve's proven ISC2 mechanical seal platform to provide the reliability and versatility to address all of these challenges.

Features and customer benefits

- **Enhanced reliability** due to robust internal clearances that allow for a shaft run-out capability of 1.14 mm (0.045 in.) TIR
- **Maintain a clean operating environment** for the mechanical seal while also eliminating fugitive emissions as a result of the liquid-barrier, dual-pressurized configuration.
- **Extended mean time between repair (MTBR)** as a result of exclusive thermal management technology, which dramatically improves heat transfer between the silicon carbide rotating seal face and the sleeve in order to lower seal face operating temperatures
- **Product side seal** has reverse-pressure capability.
- **Ensure the seal faces stay cool** at extremely low shaft speeds with an integral volute groove, which significantly increases barrier fluid flow within the seal.
- **Maximized seal face integrity** as a result of square-head drive pins, which self-align with the seal faces to distribute torque loads evenly
- **Versatility** to handle a broad range of applications for both glass-lined and steel vessels





Materials of construction

Metal parts	316 stainless steel, alloy C-276, alloy 20, titanium
Seal faces	Premium resin carbon vs. sintered silicon carbide Sintered silicon carbide vs. sintered silicon carbide Premium resin carbide vs. tungsten carbide Tungsten carbide vs. sintered silicon carbide
Metal bellows	Alloy C-276
Elastomers	Fluoroelastomer Perfluoroelastomer Ethylene propylene diene monomer (EPDM) Tetrafluoroethylene propylene (TFE propylene)
Springs	Alloy C-276
Set screws	17-4 H900 stainless steel

Operating parameters

Vessel pressure	Vacuum to 300 psig (20.7 bar)
Product temperature	-40°C to 240°C (-40°F to 400°F)
Shaft speed	Up to 175 rpm
Size range	25 to 203 mm (1.000 to 8.000 in.)
Run-out capability	Up to 1.14 mm (0.045 in.) TIR on shaft sizes up to 89 mm (3.500 in.) and 1.52 mm (0.060 in.) TIR on shaft sizes greater than 89 mm (3.500 in.)

Configurations

- Internal cooling option for higher temperatures available
- Cooling flange for higher temperatures up to 300°C (572°F) available
- Available with or without bearing
- DIN compatibility available



Improve uptime and extend equipment life with predictive maintenance



Predictive maintenance is one of the best ways to improve the reliability of mixer and agitator seals. With RedRaven, you'll be able to monitor ISC2-MW mixer seal temperatures, pressures and flow rates. The end-to-end internet of things (IoT) solution enables plant operators and technicians to understand what's happening inside flow control equipment. This means corrective actions can be taken sooner, often preventing unplanned shutdowns.

By proactively addressing equipment issues, uptime can be improved, maintenance costs can be reduced, and — most importantly, safety and reliability will increase.


Discover more at Flowserve.com/RedRaven

Reservoirs and circulators to match your requirements



NR Series reservoirs

NR Series reservoirs are ideally suited for unpressurized or pressurized seal configurations. Available in many pre-engineered configurations or customizable to your requirements, these reservoirs are easy to install and maintain with water or other barrier/buffer fluids.



N54 circulators

N54 barrier fluid circulators are designed to provide pressurized clean barrier fluid at a controlled flow rate, pressure and temperature. Flowserve offers a complete line of standard circulators for a wide range of applications using water or other barrier fluids.

Flowserve Corporation
5215 North O'Connor Blvd.
Suite 700
Irving, Texas 75039-5421 USA

Flowserve Corporation has established industry leadership in the design and manufacture of its products. When properly selected, this Flowserve product is designed to perform its intended function safely during its useful life. However, the purchaser or user of Flowserve products should be aware that Flowserve products might be used in numerous applications under a wide variety of industrial service conditions. Although Flowserve can provide general guidelines, it cannot provide specific data and warnings for all possible applications. The purchaser/user must therefore assume the ultimate responsibility for the proper sizing and selection, installation, operation, and maintenance of Flowserve products. The purchaser/user should read and understand the Installation Instructions included with the product, and train its employees and contractors in the safe use of Flowserve products in connection with the specific application.

While the information and specifications contained in this literature are believed to be accurate, they are supplied for informative purposes only and should not be considered certified or as a guarantee of satisfactory results by reliance thereon. Nothing contained herein is to be construed as a warranty or guarantee, express or implied, regarding any matter with respect to this product. Because Flowserve is continually improving and upgrading its product design, the specifications, dimensions and information contained herein are subject to change without notice. Should any question arise concerning these provisions, the purchaser/user should contact Flowserve Corporation at any one of its worldwide operations or offices.

©2023 Flowserve Corporation. All rights reserved. This document contains registered and unregistered trademarks of Flowserve Corporation. Other company, product, or service names may be trademarks or service marks of their respective companies.

SSBR000926-01 (EN/A4) July 2023