



TIMOTHY OULTON

ASSEMBLY INSTRUCTION

FROZEN SCNCE

PARTS ENCLOSED

ITEMS	DIAGRAM	DESCRIPTION	QTY.
(A)		Junction Box (Not included) 50LB. MIN.FIXTURE RATED	1
(B)		Mounting Screws (Not included)	6
(C1)		Wire Nut	3
(C2)		Wire Nut	1
(D)		Wall Plate	1
(E)		Body	1
(E22)		Screw	42+10
(F)		Screw	1
(E1-E21)		stone (Each 1 pcs)	1
(G)		Allen Screwdriver	1

IMPORTANT SAFETY INSTRUCTIONS:

1. Use an authorized and certified electrician for consultation and installation.
2. This fixture has been rated for LED 12-watt maximum LED strip.
3. To avoid the risk of fire, do not exceed the recommended wattage.
4. The manufacturer and distributor accepts no liability for incorrect installation.
5. The ceiling must have at least the capacity of 5 times the weight of the ceiling light. For this light at least a ceiling capacity of 82.5kg (412.5lb) is required.
6. For indoor use only.
- 7.Keep away from children.

Warnings:


1. Turn-off electricity supply at main circuit panel before installing. Do not connect electricity supply until your wall light is fully assembled and installed.
2. All wires are connected. Do not remove the wall light from its packaging by pulling on the power cord, as a bad connection may result.
3. To reduce the risk of fire, electrical shock, or personal injury, always turn off the ceiling light and allow it to cool prior to replacing light bulb. Do not touch bulb when fixture is turned on or look directly at light bulb. Keep flammable materials away from light bulb.
4. Deviation from instructions may result in a risk of fire or electric shock.

PRODUCT DESCRIPTION:

Width: 28 cm (11 in)
 Height: 68 cm (26.75 in)
 Depth: 17.2 cm (6.75 in)
 Weight:16.5kgs (36.3lbs)
 Grounded / Hardwired

TO ASSEMBLE:

1. Carefully remove all parts from the box and remove all plastic covering.
2. Turn OFF power to the junction box where the wall light will be installed.
3. Loosen the bolts(F) from wall plate (D).
4. Attach the wall plate (D) to the wall with mounting screw(B).
5. Attach the body (E) to wall plate (D) with bolt (F).
6. Connect wires from the fixture to the wall wires referring to Wire & Safety Guidelines with wire nuts (C).
7. Attach the body (E) to wall plate (D) with bolt (F).
8. Attach the calcite shades from E1 to E21 to the body(E), and fix from the back of the body(E) with screw(E22) after adjustment.
9. Restore power to the junction box and test wall light fixture.

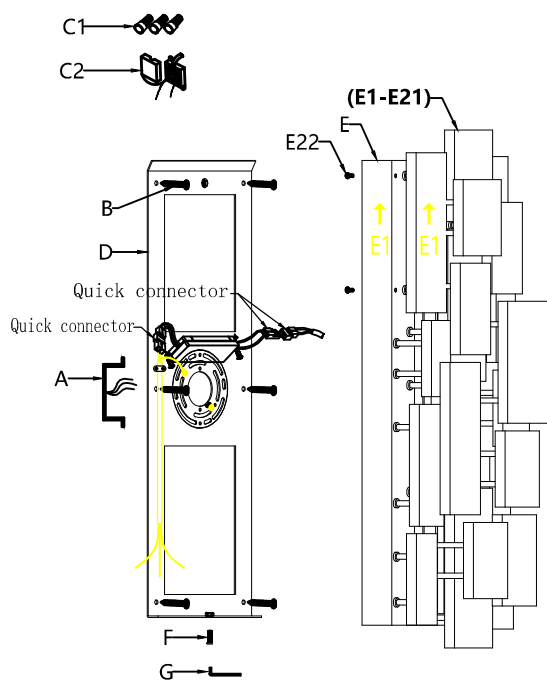

CARE INSTRUCTIONS:

1. Make sure that the power is turned off and bulb has cooled before handling.
2. Wipe clean with a dry cloth / mild soapy solution. Do not use corrosive cleaners.
3. The cable/cord of this ceiling light cannot be replaced: If the cable is damaged, do not use the light.

ENVIRONMENT:

Special waste handling may be required. Please contact your local authorities for more information.



TIMOTHY OULTON ASSEMBLY INSTRUCTION

FROZEN SCONCE

Replace the lightsource:

1. Turn OFF power to the junction box where the wall light installed.
2. Always prevent the product from scratching when installation.
3. Unscrew the bolt (F) and free body the body(E), unlock the quick connector.
4. Unscrew the screw (K) to take out the lightsource unit(I), remove the plastic cover(H).
5. Find and LED strip from the lightingsource unit (I) and replace it .

