

SNOQUALMIE VALLEY SCHOOL DISTRICT


King County, Washington

2024 School Seismic Safety Project Site Class Report

The **School Seismic Safety Project (SSSP)** is a multi-year, statewide effort by the Washington Geological Survey (WGS) and the Office of Superintendent of Public Instruction (OSPI) to assess seismic vulnerability at Washington schools. This report provides the site class—a critical design parameter for seismic retrofits and new building construction—for each of the schools in the district named at the top of this report. This report contains seismic site class information and is not a comprehensive evaluation of all seismic or other geologic hazards that may be present (such as tsunami, volcano, landslide, or liquefaction hazards). For more information on geologic hazards visit: <https://www.dnr.wa.gov/programs-and-services/geology/geologic-hazards-and-environment>. For site specific hazard assessments contact a qualified professional.

SOIL AMPLIFICATION DURING EARTHQUAKES

The most destructive seismic waves produced during an earthquake are shear waves (side-to-side shaking) and surface waves (large waves that travel along the surface of the Earth). As these seismic waves spread outward from the epicenter of an earthquake, they are amplified or dampened depending on the material they pass through. In general, softer soils and sediments produce more shaking than harder soils or bedrock.

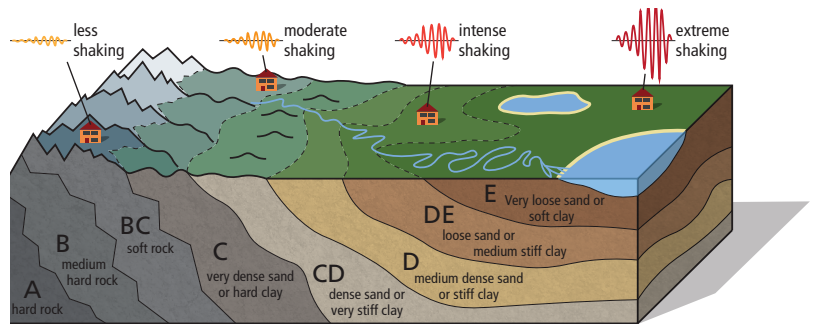

Seismic waves are amplified or damped when traveling through different geologic materials. Site class (labels A, B, BC...) is an estimate of the degree to which soil or bedrock may amplify or dampen shaking during an earthquake.

SITE CLASS: MEASURING SOIL AMPLIFICATION

Site class is an estimate of the degree to which the soil and rock properties of a given location will amplify shaking during an earthquake. Site class is a national standard defined by the the National Earthquake Hazards Reduction Program (NEHRP) that is incorporated into all major building codes, including the American Society of Civil Engineers (ASCE) and state and international building codes.

Site class can be determined by measuring how fast shear waves travel through the upper 30 m (~100 ft) of soil and rock, a measurement known as the time-averaged shear wave velocity down to 30 m or 100 ft (we abbreviate this as the symbol \bar{v}_s). Soft soils that amplify earthquake shaking exhibit low \bar{v}_s values, while hard soils and bedrock that shake less exhibit high \bar{v}_s values (see table on right).

At each campus we use geophysical analyses to measure the \bar{v}_s , and then assign a site class to each school according to table 20.2-1 of ASCE 2022 (a publication that describes the standards of ASCE). Site classes A, B, and E have additional diagnostic criteria related to the thickness of overlying soil, presence of clay, and other material properties, that may require a separate geotechnical assessment before being used to guide seismic retrofits or construction (see ASCE section 20.2).

Site class	Material description	\bar{v}_s (ft/sec)	Ground shaking amplification
A*	Hard rock	>5,000	Low
B*	Medium hard rock	3,000–5,000	↓
BC	Soft rock	2,100–3,000	
C	Very dense sand, hard clay	1,450–2,100	
CD	Dense sand, very stiff clay	1,000–1,450	
D	Medium dense sand, stiff clay	700–1,000	
DE	Loose sand, medium stiff clay	500–700	↓
E*	Very loose sand, soft clay	<500	

* Site classes A, B, and E have additional diagnostic criteria that may require a separate geotechnical assessment (see section 20.2 in ASCE 2022).

Site class definitions based on table 20.2-1 in ASCE 2022. \bar{v}_s is the time-averaged shear wave velocity down to 30 m (~100 ft). Ground shaking amplification generally increases with lower measured \bar{v}_s .

CONTENTS OF THIS REPORT

Pages 1–2 Overview and introduction

Page 3 Results table

Page 4 Technical description of methods


Page 5–9 Results for each school, including a site map

Page 10 Disclaimer and list of references

SNOQUALMIE VALLEY SCHOOL DISTRICT

King County, Washington

2024 School Seismic Safety Project Site Class Report

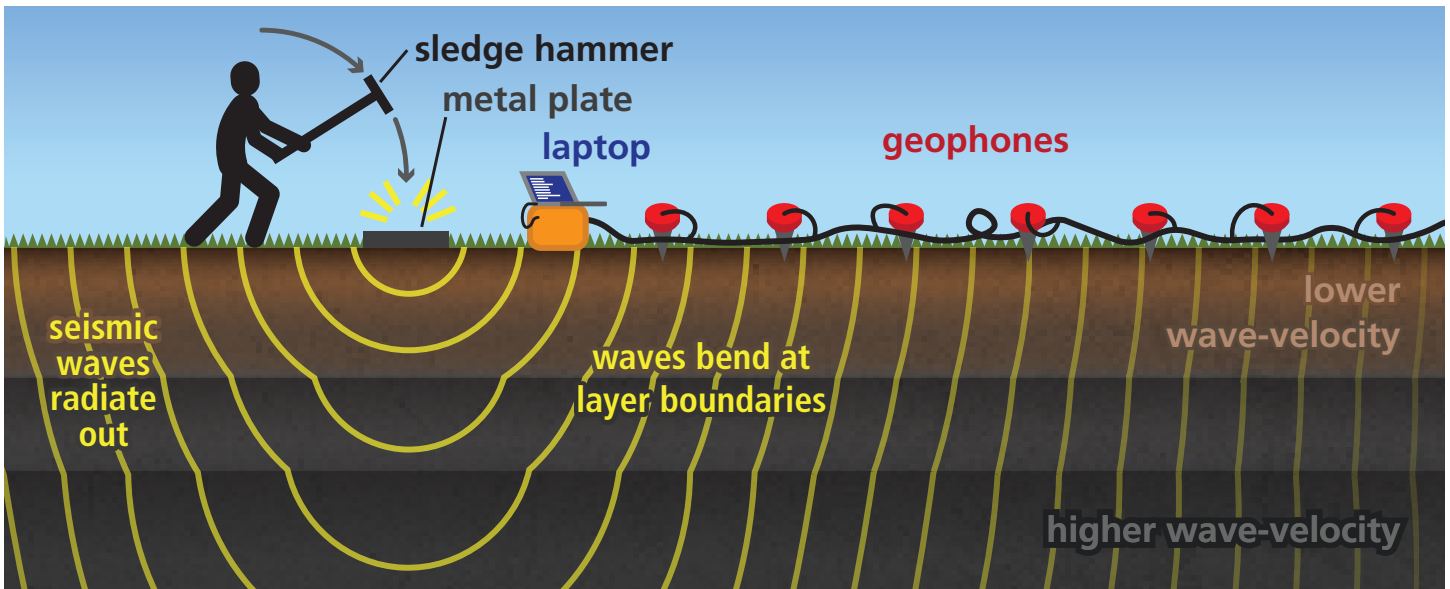

Schematic showing how the MASW site classification method works. The strike of a sledge hammer produces seismic waves that propagate through the subsurface and are recorded along an array of geophones. \bar{v}_s can then be calculated from these recordings.

HOW WE MEASURE \bar{v}_s

For each campus, we select a site located on representative geologic material while also considering the possible influence of ambient seismic noise—for example, noise from roads or construction. After laying out a 230–310 ft (70–95 m) array of approximately 48 geophones (ground motion sensors), we collect two types of data. In the first, for a technique called Multi-Channel Analysis of Surface Waves (MASW), we strike the ground with a sledge hammer to produce seismic waves that propagate through the subsurface and are recorded along the array of geophones (see figure above). We also collect a passive recording of ambient ground vibrations for a technique called Microtremor Array Measurements (MAM). Both datasets are then used to calculate a single \bar{v}_s for that site using specialized software. For details on the MASW and MAM techniques, see *Technical Methods* near the end of the report.



A WGS scientist generates seismic waves by striking a metal plate with a sledge hammer. The waves are recorded by an array of geophones visible on the ground in the background.

HOW TO USE THIS REPORT

Engineers use site class as a key parameter in ensuring retrofits and new building construction adhere to seismic design principles. Therefore, this report should be archived with any geotechnical/soil reports and blueprints associated with your schools. The \bar{v}_s and site class results in this report have been shared with OSPI and entered into their Information and Condition of Schools (ICOS) database. The results, including data collection parameters and analysis details for each seismic array, are available through the [Washington Geologic Information Portal](#) (found under *Earthquakes > Shear Wave Data*). Raw data are also available upon request. Our contact information is below.

SNOQUALMIE VALLEY SCHOOL DISTRICT

King County, Washington

2024 School Seismic Safety Project Site Class Report

Table of results: Names of the schools included in the study, their site class assessment result, \bar{V}_s measurement (reported in metric and standard units), Information and Condition of Schools (ICOS) site ID, and a unique site class array identification number. \bar{V}_s is the time-averaged shear wave velocity down to 30 m (~100 ft). 'Site Class Array ID' is a unique ID for the geophone array used at a school and consists of the 4-digit year, 2-digit month, 2-digit day, and 2-digit enumeration of the surveys collected that day. Note that schools may share the same array (and therefore Site Class Array ID) if they are located close together.

Row	School Name	Site Class	\bar{V}_s (ft/s)	\bar{V}_s (m/s)	ICOS Site ID	Site Class Array ID (yyyymmdd##)
1	Cascade View Elementary School	BC	2176	663.1	21420	2021091402
2	Chief Kanim Middle School	CD	1449	441.8	21411	2021091601
3	Edwin R. Opstad Elementary School	CD	1307	398.3	21412	2021092301
4	Fall City Elementary School	CD	1152	351.1	21416	2021100102
5	Mount Si High School (new) **	F			22283	
6	North Bend Elementary School	D	982	299.4	21415	2021092101
7	Snoqualmie Elementary School	DE	639	194.8	21414	2021091602
8	Snoqualmie Middle School	DE	594	181.2	21413	2021100801
9	Timber Ridge Elementary School	CD	1266	385.8	21418	2021100802
10	Twin Falls Middle School	C	1655	504.5	21419	2021091401

‡ School participated in SSSP1
 ‡ ‡ School participated in SSSP2

SSSP1 and SSSP2 were statewide multi-year projects to assess school vulnerability across the state. Project information and final reports can be found here:
www.dnr.wa.gov/school-seismic-safety

* Site classes A, B, and E have additional diagnostic criteria that may require a separate geotechnical assessment (see ASCE 2022 section 20.2).

** We did not perform \bar{V}_s measurements at Mount Si High School. Instead, site class F was assigned to the site based on geotechnical engineering report: Associated Earth Sciences, Inc - Project No. KE150249A. Site class F has special geotechnical diagnostic criteria (see ASCE 2022 section 20.2).

SNOQUALMIE VALLEY SCHOOL DISTRICT


King County, Washington

2024 School Seismic Safety Project Site Class Report

TECHNICAL METHODS: DETERMINING SITE CLASS

At each school campus, WGS geophysicists lay out a seismic array that typically includes 24 to 48 geophones (ground motion sensors). They then conduct two surveys: (1) an active seismic survey in which a steel plate is struck with a 16-lb sledgehammer, producing seismic waves that are recorded and later analyzed via multi-channel analysis of surface waves (MASW) (Park and others, 1999; Xia and others, 1999); and (2) a passive seismic survey that analyzes microtremor using the Microtremor Array Measurements (MAM) method (Hayashi and others, 2022). The same geophone array is used for both data types and the geophone array deployment usually occurs in grassy ballfields or along sidewalks. If multiple schools are located close together, and the local geology is not too complex, we may use a single array to measure the \bar{V}_s and determine the site class for all of the schools.

After data collection in the field, the next step is data processing and interpretation. The raw seismic data are transformed from the time domain (panels A and C in figure below) into the frequency domain (panels B and D below) to generate dispersion images from which we identify the fundamental mode of vibration and pick dispersion curves for both MASW and MAM (West and others, 2019). Since sampling depth is a function of wavelength, and MASW typically samples higher frequencies (shallower depths) while MAM samples lower frequencies (deeper depths), we consider the dispersion curves generated by both methods, often combining them into a single dispersion curve. Using the dispersion curves, we generate an initial model and invert it to generate a 1-D shear-velocity depth profile (SVDP) down to 30 m (panel E below). The SVDP is a non-unique 1-D model that depicts the shear-wave velocity of the subsurface as a function of depth. Using the SVDP, we calculate the \bar{V}_s , and after carefully considering possible subsurface heterogeneity, we then assign a site class to each school (West and others, 2019). We use the midpoint of the geophone array as the point location of the SVDP and site class assessment.

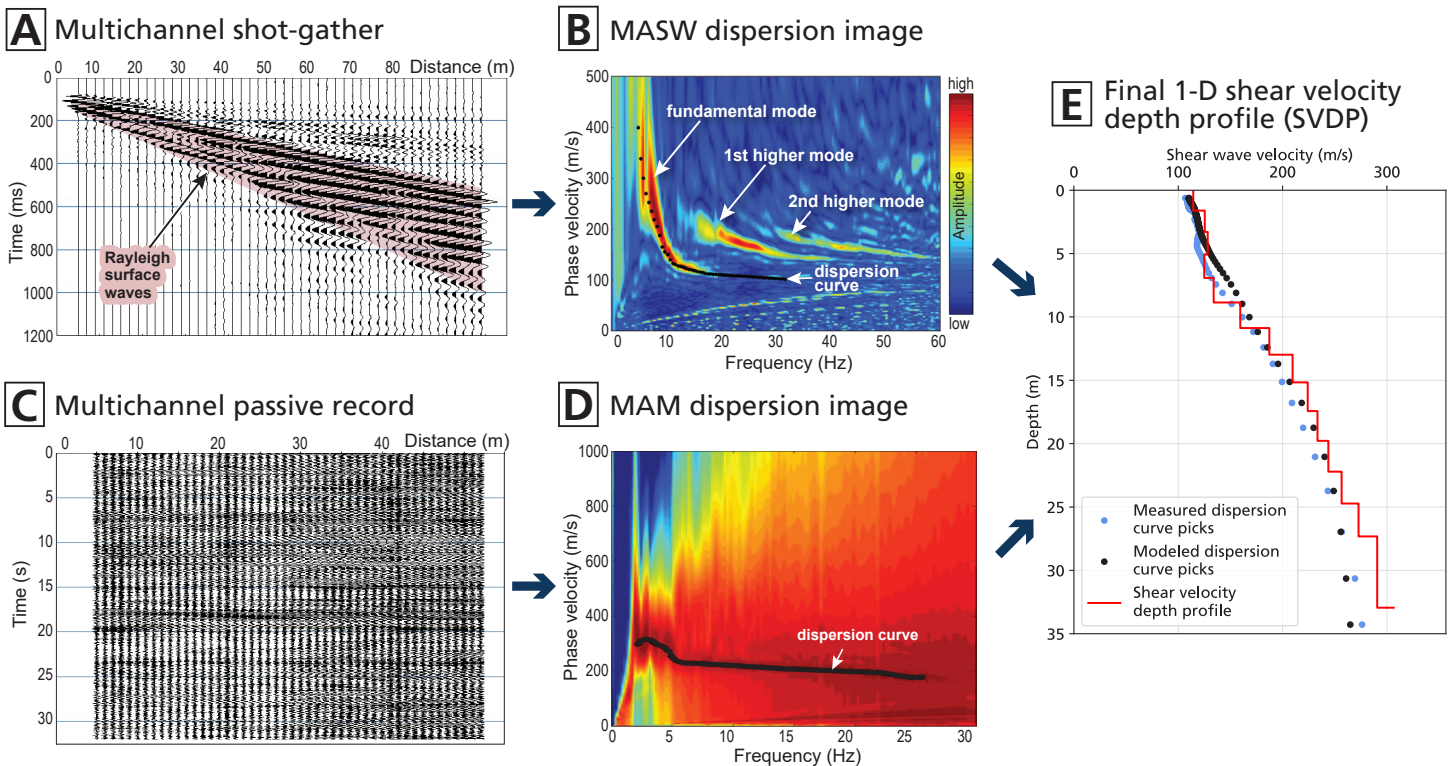



Typical analysis workflow for the active MASW and passive MAM methods. A. MASW shot-gather in which the source, a metal plate struck by a sledge hammer, was outside the array. The propagation of Rayleigh surface waves is highlighted in red. B. MASW-derived phase-velocity vs. frequency dispersion image with the fundamental mode of surface waves. The fundamental mode, shown with black circles, is identified as the line of highest spectral amplitude (warmer colors) with the lowest phase velocity. Two higher modes of vibration are labeled. C. Passive MAM 30-second multi-channel record. D. MAM-derived phase-velocity vs. frequency dispersion image with the trend of the fundamental mode identified with black dots. E. The final inverted 1-D SVDP.

SNOQUALMIE VALLEY SCHOOL DISTRICT




King County, Washington

2024 School Seismic Safety Project Site Class Report

Cascade View Elementary School

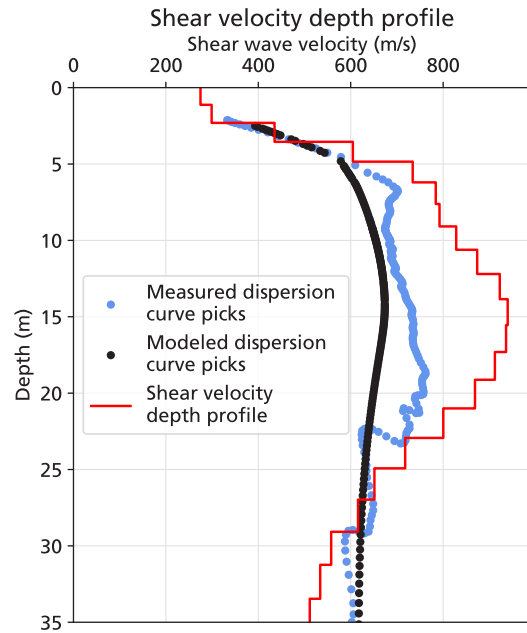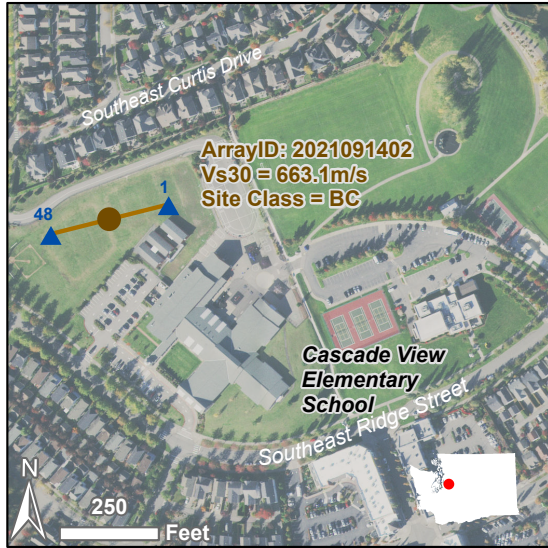

Chief Kanim Middle School

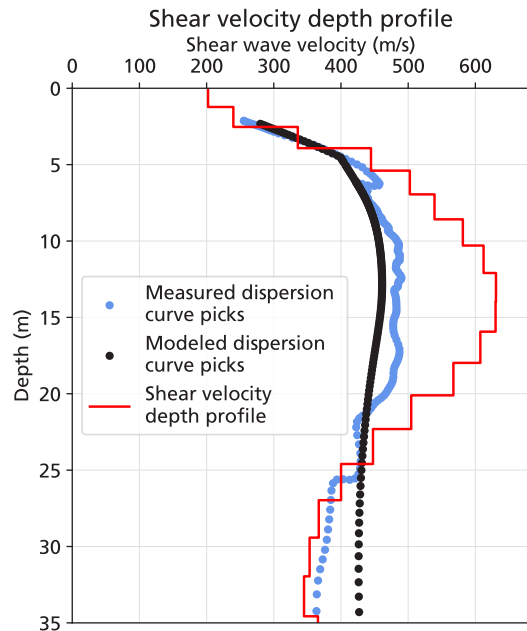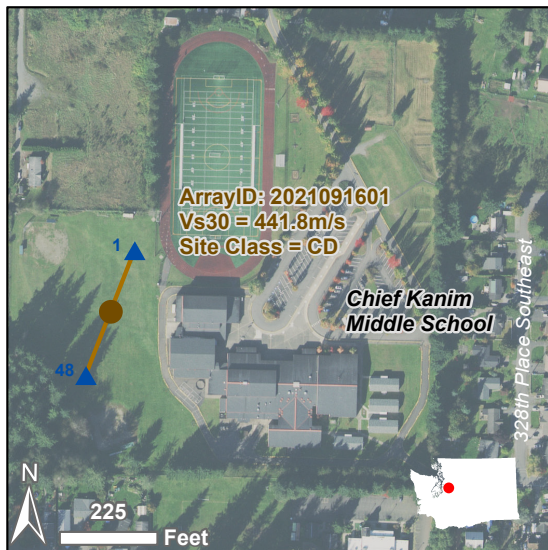

Above: Location maps showing where the seismic surveys were conducted at each campus.

Above: Final Shear Velocity Depth Profiles (SVDP). If the final SVDP is based on the initial model, then only the measured dispersion curve picks are shown (blue dots).

$$\bar{V}_s = \frac{30}{\sum_i \left(\frac{h_i}{V_{s_i}} \right)}$$


Left: The equation for \bar{V}_s (in m/s), where h_i is the thickness of any layer between 0 m and 30 m, and V_{s_i} is the shear wave velocity of that layer.

SNOQUALMIE VALLEY SCHOOL DISTRICT




King County, Washington

2024 School Seismic Safety Project Site Class Report

Edwin R. Opstad Elementary School

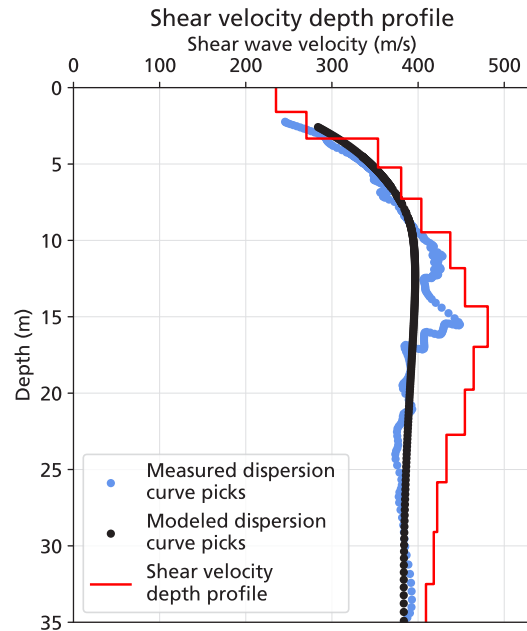

Fall City Elementary School

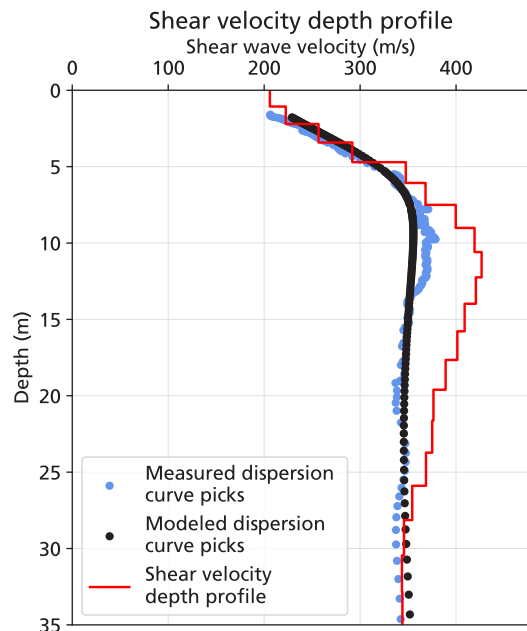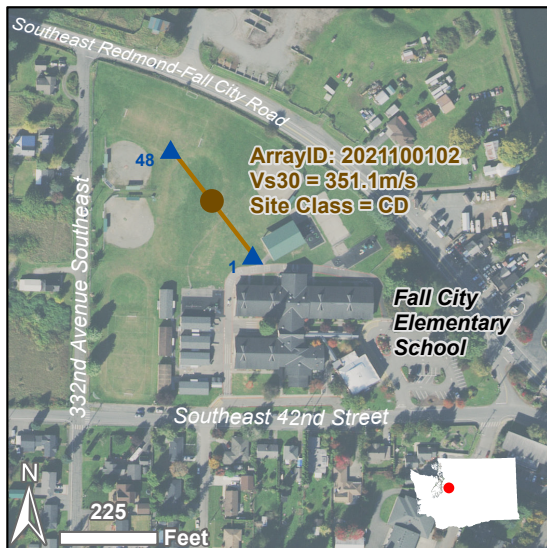

Above: Location maps showing where the seismic surveys were conducted at each campus.

Above: Final Shear Velocity Depth Profiles (SVDP). If the final SVDP is based on the initial model, then only the measured dispersion curve picks are shown (blue dots).

$$\bar{V}_s = \frac{30}{\sum_i \left(\frac{h_i}{V_{s_i}} \right)}$$



Left: The equation for \bar{V}_s (in m/s), where h_i is the thickness of any layer between 0 m and 30 m, and V_{s_i} is the shear wave velocity of that layer.

SNOQUALMIE VALLEY SCHOOL DISTRICT




King County, Washington

2024 School Seismic Safety Project Site Class Report

North Bend Elementary School

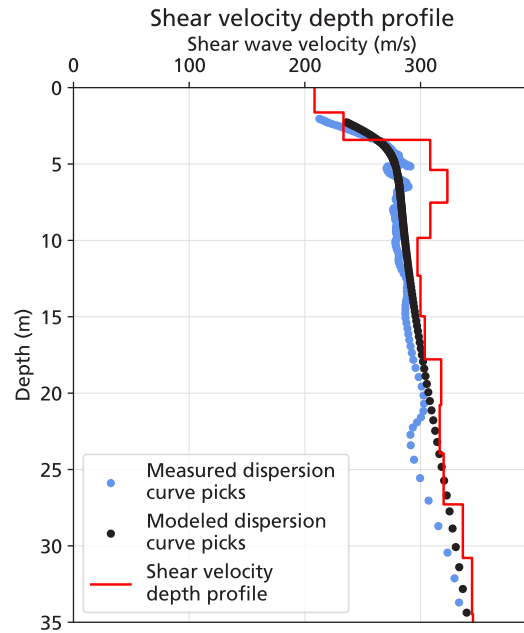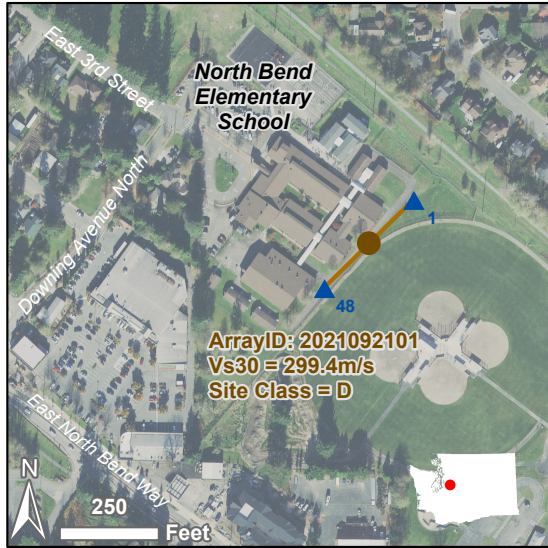

Snoqualmie Elementary School

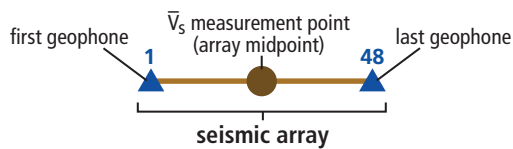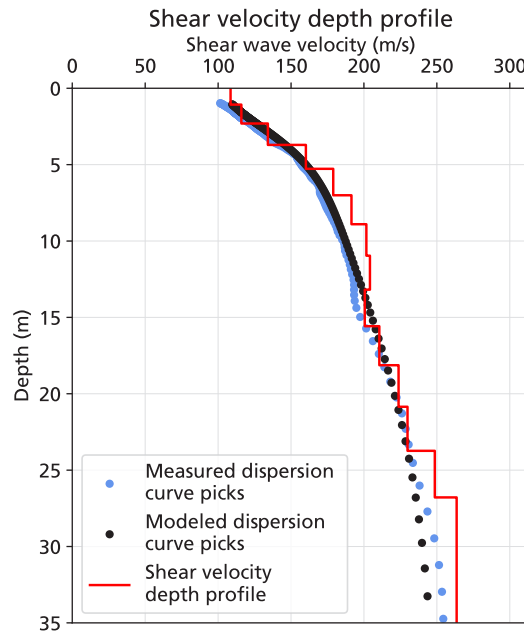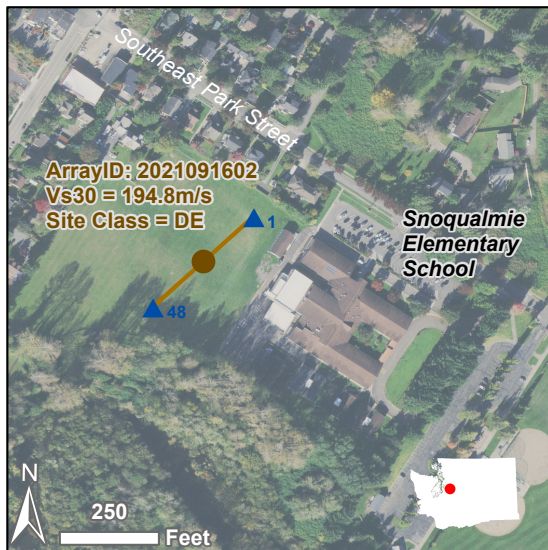

Above: Location maps showing where the seismic surveys were conducted at each campus.

Above: Final Shear Velocity Depth Profiles (SVDP). If the final SVDP is based on the initial model, then only the measured dispersion curve picks are shown (blue dots).

$$\bar{V}_s = \frac{30}{\sum_i \left(\frac{h_i}{V_{s_i}} \right)}$$



Left: The equation for \bar{V}_s (in m/s), where h_i is the thickness of any layer between 0 m and 30 m, and V_{s_i} is the shear wave velocity of that layer.

SNOQUALMIE VALLEY SCHOOL DISTRICT



King County, Washington

2024 School Seismic Safety Project Site Class Report

Snoqualmie Middle School

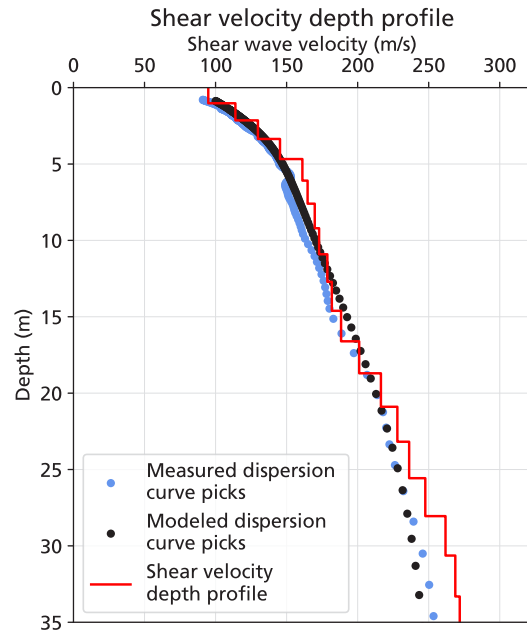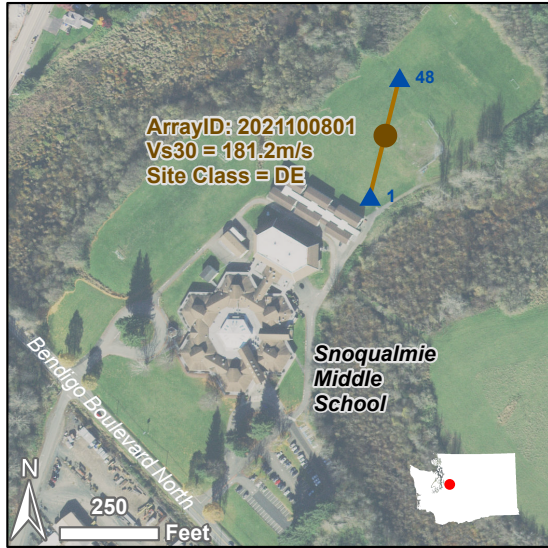

Timber Ridge Elementary School

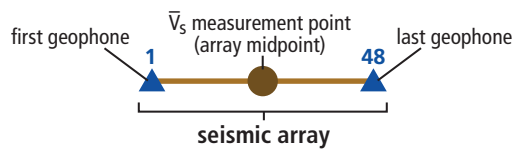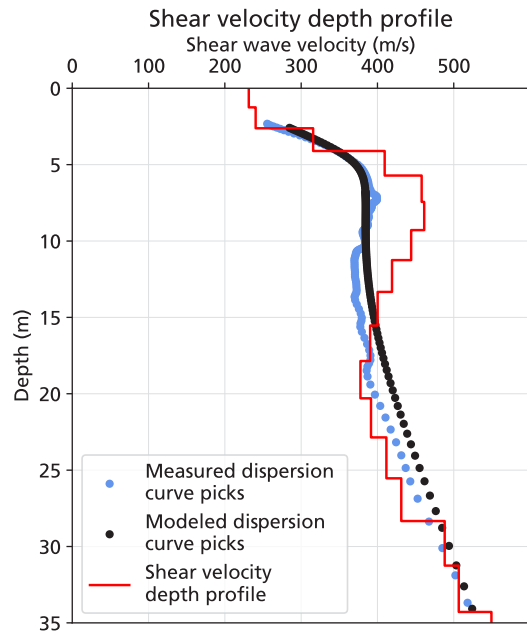

Above: Location maps showing where the seismic surveys were conducted at each campus.

Above: Final Shear Velocity Depth Profiles (SVDP). If the final SVDP is based on the initial model, then only the measured dispersion curve picks are shown (blue dots).

$$\bar{V}_s = \frac{30}{\sum_i \left(\frac{h_i}{V_{s_i}} \right)}$$



Left: The equation for \bar{V}_s (in m/s), where h_i is the thickness of any layer between 0 m and 30 m, and V_{s_i} is the shear wave velocity of that layer.

SNOQUALMIE VALLEY SCHOOL DISTRICT


King County, Washington

2024 School Seismic Safety Project Site Class Report

Twin Falls Middle School

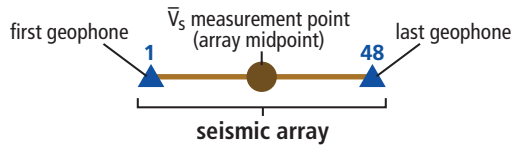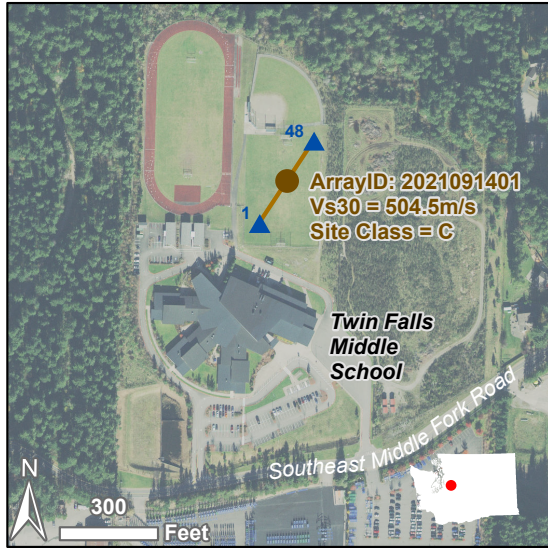

Above: Location maps showing where the seismic surveys were conducted at each campus.

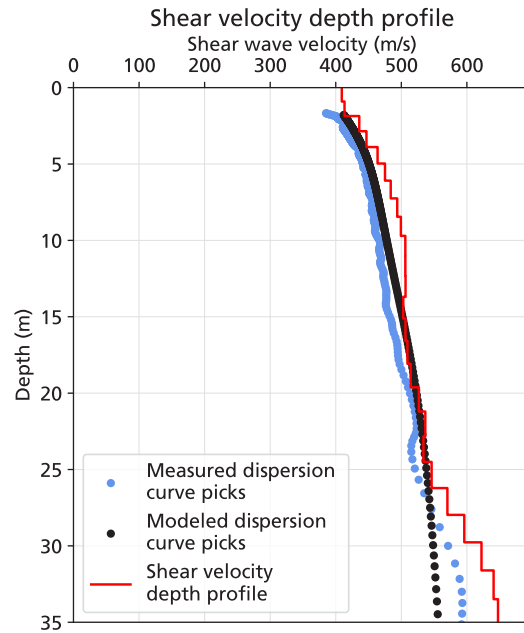

Above: Final Shear Velocity Depth Profiles (SVDP). If the final SVDP is based on the initial model, then only the measured dispersion curve picks are shown (blue dots).

$$\bar{V}_s = \frac{30}{\sum_i \left(\frac{h_i}{V_{s_i}} \right)}$$

Left: The equation for \bar{V}_s (in m/s), where h_i is the thickness of any layer between 0 m and 30 m, and V_{s_i} is the shear wave velocity of that layer.

SNOQUALMIE VALLEY SCHOOL DISTRICT

King County, Washington

2024 School Seismic Safety Project Site Class Report

DISCLAIMER

Disclaimer of Warranties. No express or implied warranty of any kind is made regarding the information contained herein, including, but not limited to, the warranty of merchantability, warranty of fitness for a particular purpose, or warranties of content, completeness, accuracy, reliability, usefulness, or that use would not infringe on privately-owned rights.

Use at Your Own Risk. The information presented here is intended for use as a general screening tool in community planning or for creating awareness and understanding of geologic information and is neither intended to constitute advice nor is it to be used as a substitute for site-specific advice from a licensed professional. You use this information at your own risk and should not act (or refrain from acting) based upon the information without independently verifying the information and, as appropriate, obtaining professional advice regarding your particular facts and circumstances.

Limitation on Liability. User agrees there shall not be liability on the State of Washington, Washington Department of Natural Resources, or their officers, agents, representatives, or employees for any damages allegedly resulting from any use of or reliance on this information. Under this limitation, there shall be no liability for any damages whatsoever, including but not limited to any damages in contract or tort for compensatory, consequential, punitive, direct, indirect, or special damages such as personal injuries, property damage, loss of profits, or any other losses or expenses.

No Endorsement. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not constitute or imply its endorsement, recommendation, or favoring. Further, the views and opinions of authors expressed herein do not necessarily state or reflect those of the State of Washington or any agency thereof. Neither the State of Washington, nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the State of Washington or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the State of Washington or any agency thereof.

REFERENCES

- American Society of Civil Engineers, 2022, ASCE standard, ASCE/SEI, 7-22, Minimum design loads and associated criteria for buildings and other structures: American Society of Civil Engineers, 975 p. [<https://doi.org/10.1061/9780784415788>]
- Hayashi, Koichi; Asten, M. W.; Stephenson, W. J.; Cornoué, Cécile; Hobiger, Manuel; Pilz, Marco; Yamanaka, Hiroaki, 2022, Microtremor array method using spatial autocorrelation analysis of Rayleigh-wave data: *Journal of Seismology*, v. 26, p. 601–627. [<https://doi.org/10.1007/s10950-021-10051-y>]
- Park, C. B.; Miller, R. D.; Xia, Jianghai, 1999, Multichannel analysis of surface waves: *Geophysics*, v. 64, p. 800–808. [<https://doi.org/10.1190/1.1444590>]
- West, L. T.; Nielson, Travis; Forson, Corina, 2019, Report on site class assessments for the Washington State school seismic safety project: Washington Geological Survey Open File Report 2019-01, 214 p. [http://www.dnr.wa.gov/publications/ger_ofr2019-01_school_seismic_site_class_report.pdf]
- Xia, Jianghai; Miller, R. D.; Park, C. B., 1999, Estimation of near-surface shear-wave velocity by inversion of Rayleigh waves: *Geophysics*, v. 64, no. 3, p. 691–700. [<https://doi.org/10.1190/1.1444578>]