

Professional Display

QHB | QMB | QBB

Unlock new display possibilities for your business




Easy maintenance and designed with sustainability in mind

Streamlined set up and easy maintenance

Install and maintain without frustration. QHB / QMB / QBB Professional Display offers a simple set-up process that allows managers to configure after installation and maintain fixed settings from anywhere in the world. With access to the web-engine upgrades, showcase the latest innovative content exactly as you intend.

Auto Leveller

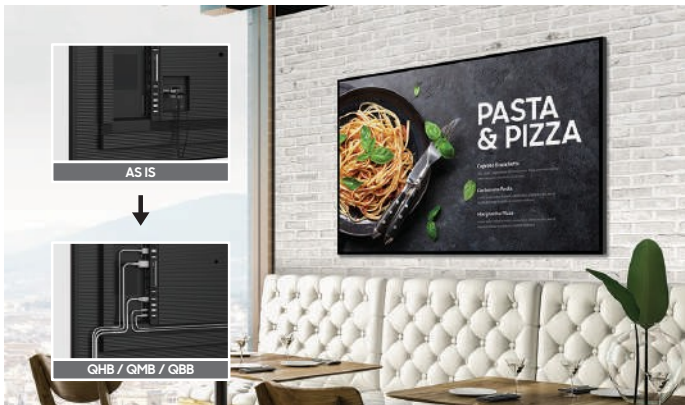

Clean cable management



Portrait and Landscape Orientation

Slim and symmetrical design

Narrow bezels and a symmetrical design allow for seamless integration into virtually any environment with simple mounting and installation. To maximise space savings, all terminals face outwards, ensuring the display hangs flush against your wall.*


*Wall gap may vary depending on installation and wall type

Clean cable guide

QHB / QMB / QBB Professional Displays blend perfectly into virtually any business environment. With clean cable guide feature, the screen draws maximum focus to what is on the display, not the cables connected to it.

Sustainability

QHB / QMB / QBB Professional Displays use recycled plastics for the rear side cover and packaging. Additionally, Samsung received certifications for energy savings and carbon footprint reduction and complies with restriction guidelines for hazardous substances such as RoHS, REACH and WEEE..

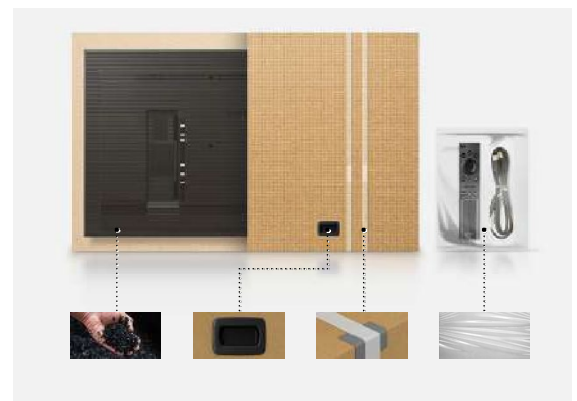

Multiple ways to connect and collaborate

Connectivity

Enhance professional environments with expert tools. Built-in professional modes enable more possibilities in specific verticals.



Custom Home



Upgradable Web-engine



DICOM Simulation Mode



Custom Home

Designed for IT professionals to simplify conference room management, Custom Home allows admins to lock specific meeting room settings, preventing users from changing display settings in between meetings. Now, conference rooms can work throughout the day as intended, with no errors, allowing IT to focus on other

Upgradable Web-engine

Upload virtually any piece of content, no matter how innovative. QHB / QMB / QBB Professional Display frequent web-engine upgrades enables the latest types of content to be played, allowing for diversified and engaging creative assets.



Director Mode

Featuring built-in Director Mode, Samsung QHB / QMB / QBB Professional Display allows users to minimise post-processing to bring images close to the director's original intention. From colour representation to picture proportion, directors can express their vision without any distortion.



DICOM Simulation Mode

Medical teams can collaborate efficiently and effectively thanks to Samsung QHB / QMB / QBB Professional Displays' DICOM Simulation Mode, which meets 100% of grayscale required by DICOM standard. Plus, it helps to simulate medical images such as X-rays*.

* Display provides a simulated experience and is not intended for diagnosis purposes.


Stunning picture quality and design

Make every visual experience impactful. QHB / QMB / QBB Professional Display provides head-turning visuals with true-to-life colours and elevates your content to 4K with AI video processing technology.* With reliable, anti-glare panels and an unintrusive design, audiences see content clearly, without distraction.


*Picture quality of upscaled content varies depending on quality of source content.



Dynamic Crystal Colour



Quantum Processor 4K



Non-glare




Slim and symmetrical design



Clean cable guide

* QBB Series is not supported for non-glare.

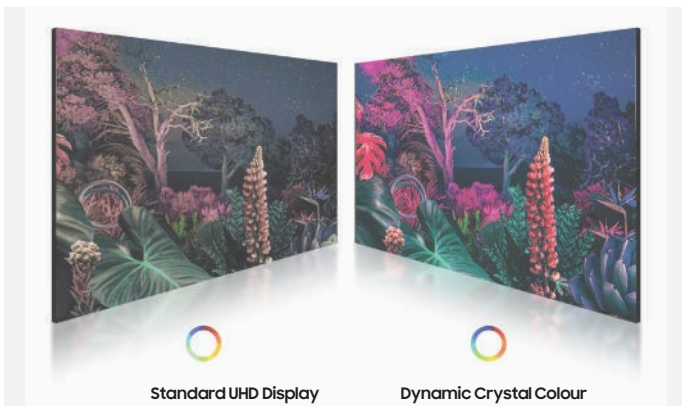

Standard UHD Display

Dynamic Crystal Colour



Glare display


Non-glare

Dynamic Crystal Colour

Dynamic Crystal Colour captures subtle differences for virtually flawless color expression using 10-bit processing, ensuring content is as lifelike as possible.

Non-glare

All QHB / QMB Professional Displays feature reliable, anti-glare panels that provide visibility from a range of angles, any time of day. The anti-glare display enables businesses to deliver accurate information in critical locations, such as airports and train stations.

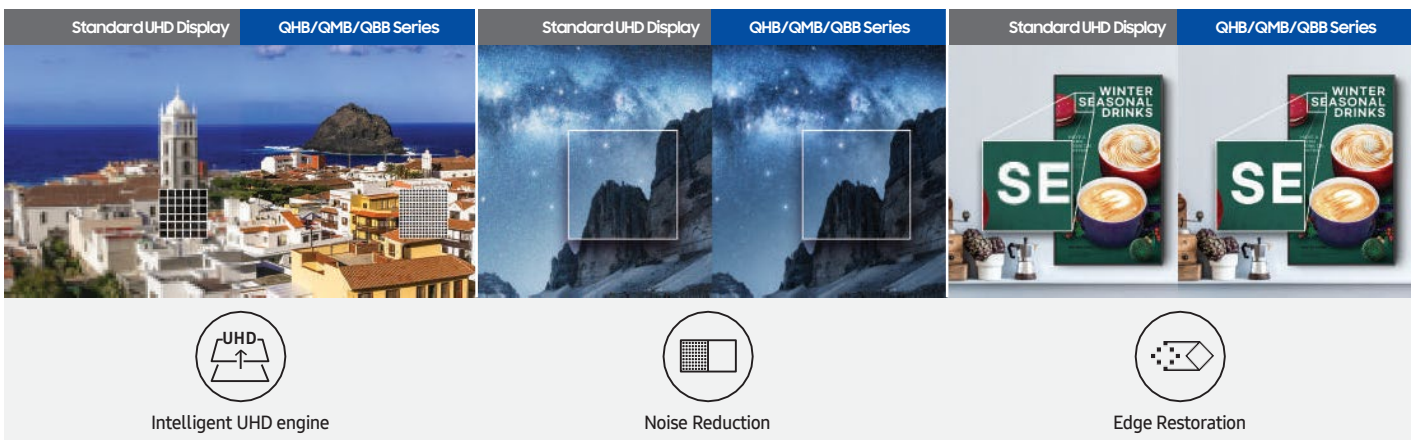

Quantum Processor 4K

Samsung's video processing technology helps enhance your content for clarity and consistency. Intelligent UHD upscaling technology, powered by Samsung's Quantum processor 4K, elevates lower-resolution video to UHD-level quality, providing professional picture quality.*

* When compared to Samsung's FHD model.

* Viewing experience may vary according to types of content and format. Picture quality of upscaled content may vary depending on quality of source content.

Business applications



Conference room



Meeting room



Retail



Airport

Specifications

| Model | | | QH43B | QH50B | QH55B | QH65B | QH75B |
|----------------------|-----------------------|--|--|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Display Panel | Diagonal Size | Class | 43 | 50 | 55 | 65 | 75 |
| | | Measured | 42.5" / 1079cm | 49.5" / 125.7cm | 54.6" / 138.7cm | 64.5" / 163.9cm | 74.5" / 189.3cm |
| | Resolution | | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) |
| | Brightness(Typ.) | | 700 nit | 700 nit | 700 nit | 700 nit | 700 nit |
| | Orientation | | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait |
| | Haze | | 25% | 25% | 25% | 25% | 25% |
| | Contrast Ratio (Typ.) | | 4000:1 | 4000:1 | 4000:1 | 4000:1 | 6000:1 |
| | Type | | VA | VA | VA | VA | VA |
| | Active Display Area | | 941.184 (H) x 529.416 (V) | 1095.84(H) x 616.41(V) | 1209.6(H) x 680.4(V) | 1428.48 (H) x 803.52 (V) | 1650.24 (H) x 928.26 (V) |
| | Pixel Pitch (mm) | | 0.2451 x 0.2451 | 0.285 x 0.285 | 0.315 x 0.315 | 0.372 x 0.372 | 0.42975 x 0.42975 |
| | Color Gamut | | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) |
| Operation Hour | | 24/7 | 24/7 | 24/7 | 24/7 | 24/7 | |
| Connectivity / Sound | INPUT | VIDEO | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) |
| | | AUDIO | N/A | N/A | N/A | N/A | N/A |
| | | USB | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 |
| | | Tuner | N/A | N/A | N/A | N/A | N/A |
| | OUTPUT | VIDEO | N/A | N/A | N/A | N/A | N/A |
| | | AUDIO | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack |
| | | USB | N/A | N/A | N/A | N/A | N/A |
| | WiFi / BT | | O / O | O / O | O / O | O / O | O / O |
| | EXTERNAL CONTROL | | RS232C(in/out), RJ45 | RS232C(in/out), RJ45 | RS232C(in/out), RJ45 | RS232C(in/out), RJ45 | RS232C(in/out), RJ45 |
| | Speaker | | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch |
| Mechanical Spec | Dimension (mm) | Set | 967.5 x 557.7 x 48.3 | 1121.4 x 643.9 x 46.3 | 1235.1 x 707.9 x 46.3 | 1453.9 x 831.0 x 46.3 | 1681.1 x 960.1 x 49.7 |
| | | Package | 1095 x 676 x 151 | 1269 x 784 x 152 | 1402 x 858 x 163 | 1611 x 973 x 185 | 1871 x 1127 x 223 |
| | Weight (kg) | Set | 10.7 | 14.5 | 19.2 | 26.6 | 40.3 |
| | | Package | 14 | 18.7 | 24.7 | 34 | 51 |
| | VESA Mount | | 200 X 200 | 200 X 200 | 200 X 200 | 400 X 400 | 400 X 400 |
| | Bezel Width (mm) | | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 11.5mm(U/L/R), 12.5mm(B) |
| Features | Internal Player | Operating System | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 |
| | | Processor | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU |
| | | Storage (FDM) | 16 GB | 16 GB | 16 GB | 16 GB | 16 GB |
| | Special | H/W | Symmetric Design (same with QxR) / Center IR / Temperature Sensor / Auto Level / Wi-Fi(2.4/5.0GHz dual) & BT | | | | |
| S/W | | Workspace (Microsoft365/VMWare/RDP) / Custom Home / Auto Source Switching & Recovery / Dicom Simulation Mode / Director Mode | | | | | |
| Certification | Safety | | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 |
| | EMC | | Class B | Class B | Class B | Class B | Class B |
| | Environment | | (TBD) | (TBD) | ENERGY STAR 8.0, EPEAT | ENERGY STAR 8.0, EPEAT | (TBD) |
| | IP Rating | | IP5x | IP5x | IP5x | IP5x | IP5x |
| | Security | | 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP | | | | |
| Power | Power Supply | | AC 100 - 240 V, 50/60 Hz | AC 100 - 240 V, 50/60 Hz | AC 100 - 240 V, 50/60 Hz | AC 100 - 240 V, 50/60 Hz | AC 100 - 240 V, 50/60 Hz |
| | Power Consumption | Max[W/h] | 138 | 176 | 160 | 204 | 264 |
| | | Typical[W/h] | 93 | 106 | 115 | 152 | 195 |
| | | Sleep mode | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W |
| Operating Condition | Temperature | | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C |
| | Relative Humidity | | 10-80% | 10-80% | 10-80% | 10-80% | 10-80% |
| Accessories | Included | | Quick Setup Guide / Warranty Card / Power Cord / RS232C(IN) Gender / Remote Controller & Batteries | | | | |
| | Optional | Stand | STN-L4355G | STN-L4355G | STN-L4355G | No | No |
| | | Mount | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME |
| | | Specialty | CML400XR | CML400XR | CML400XR | CLM450T | CLM450T |

| Model | | | QM43B | QM50B | QM55B | QM65B | QM75B |
|----------------------|-----------------------|--|--|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| Display Panel | Diagonal Size | Class | 43 | 50 | 55 | 65 | 75 |
| | | Measured | 42.5" / 1079cm | 49.5" / 125.7cm | 54.6" / 138.7cm | 64.5" / 163.9cm | 74.5" / 189.3cm |
| | Resolution | | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) |
| | Brightness(Typ.) | | 500 nit | 500 nit | 500 nit | 500 nit | 500 nit |
| | Orientation | | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait |
| | Haze | | 25% | 25% | 25% | 25% | 25% |
| | Contrast Ratio (Typ.) | | 4000:1 (* IPS - 1200:1) | 4000:1 | 4000:1 | 4000:1 | 4000:1 |
| | Type | | VA | VA | VA | VA | VA |
| | Active Display Area | | 941.184 (H) x 529.416 (V) | 1095.84(H)x 616.41(V) | 1209.6(H) x 680.4(V) | 1428.48 (H) x 803.52 (V) | 1650.24 (H) x 928.26 (V) |
| | Pixel Pitch (mm) | | 0.2451 x 0.2451 | 0.285 x 0.285 | 0.315 x 0.315 | 0.372 x 0.372 | 0.42975 x 0.42975 |
| | Color Gamut | | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) | 92% (DCI-P3, CIE 1976) |
| | Operation Hour | | 24/7 | 24/7 | 24/7 | 24/7 | 24/7 |
| Connectivity / Sound | INPUT | VIDEO | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) | DP1.2 (1), HDMI 2.0 (3) |
| | | AUDIO | N/A | N/A | N/A | N/A | N/A |
| | | USB | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 |
| | | Tuner | N/A | N/A | N/A | N/A | N/A |
| | OUTPUT | VIDEO | N/A | N/A | N/A | N/A | N/A |
| | | AUDIO | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack |
| | | USB | N/A | N/A | N/A | N/A | N/A |
| | WiFi / BT | | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| | EXTERNAL CONTROL | | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 |
| | Speaker | | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch |
| Mechanical Spec | Dimension (mm) | Set | 967.5 x 557.7 x 48.3 | 1121.4 x 643.9 x 46.3 | 1235.1 x 707.9 x 46.3 | 1453.9 x 831.0 x 46.3 | 1681.1 x 960.1 x 49.7 |
| | | Package | 1095 x 676 x 151 | 1269 x 784 x 152 | 1402 x 858 x 163 | 1611 x 973 x 185 | 1871 x 1127 x 223 |
| | Weight (kg) | Set | 10 | 13.4 | 18.1 | 24.9 | 38.3 |
| | | Package | 13.3 | 17.6 | 23.6 | 33.3 | 49 |
| | VESA Mount | | 200 X 200 | 200 X 200 | 200 X 200 | 400 X 400 | 400x400 |
| | Bezel Width (mm) | | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 11.5mm(U/L/R), 12.5mm(B) |
| Features | Internal Player | Operating System | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 |
| | | Processor | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU |
| | | Storage (FDM) | 16 GB | 16 GB | 16 GB | 16 GB | 16 GB |
| | Special | H/W | Symmetric Design (same with QxR) / Center IR / Temperature Sensor / Auto Level / Wi-Fi(2.4/5.0GHz dual) & BT | | | | |
| S/W | | Workspace (Microsoft365/VMWare/RDP) / Custom Home / Auto Source Switching & Recovery / Dicom Simulation Mode / Director Mode | | | | | |
| Certification | Safety | | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 |
| | EMC | | Class B | Class B | Class B | Class B | Class B |
| | Environment | | ENERGY STAR 8.0, EPEAT | (TBD) | ENERGY STAR 8.0, EPEAT | ENERGY STAR 8.0, EPEAT | ENERGY STAR 8.0, EPEAT |
| | IP Rating | | IP5x | IP5x | IP5x | IP5x | IP5x |
| | Security | | 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP | | | | |
| Power | Power Supply | | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz |
| | Power Consumption | Max[W/h] | 110 | 171 | 143 | 182 | 231 |
| | | Typical[W/h] | 79 | 91 | 108 | 127 | 161 |
| | | Sleep mode | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W |
| Operating Condition | Temperature | | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C |
| | Relative Humidity | | 10-80% | 10-80% | 10-80% | 10-80% | 10-80% |
| Accessories | Included | | Quick Setup Guide / Warranty Card / Power Cord / RS232C(IN) Gender / Remote Controller & Batteries | | | | |
| | Optional | Stand | STN-L4355G | STN-L4355G | STN-L4355G | No | No |
| | | Mount | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME | WMN4070SG (Land Only) WMN750ME |
| | | Specialty | CML400XR | CML400XR | CML400XR | CML450T | CML450T |

| Model | | | QB43B | QB50B | QB55B | QB65B | QB75B |
|----------------------|-----------------------|--|--|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| Display Panel | Diagonal Size | Class | 43 | 50 | 55 | 65 | 75 |
| | | Measured | 42.5" / 1079cm | 49.5" / 125.7cm | 54.6" / 138.7cm | 64.5" / 163.9cm | 74.5" / 189.3cm |
| | Resolution | | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) | 3840x2160(16:9) |
| | Brightness(Typ.) | | 350 nit | 350 nit | 350 nit | 350 nit | 350 nit |
| | Orientation | | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait | Landscape / Portrait |
| | Haze | | 2% | 3% | 2% | 2% | 5% |
| | Contrast Ratio (Typ.) | | 4000:1 | 4000:1 | 4000:1 | 4000:1 | 4000:1 |
| | Type | | VA | VA | VA | VA | VA |
| | Active Display Area | | 941.184 (H) x 529.416 (V) | 1095.84(H) x 616.41(V) | 1209.6(H) x 680.4(V) | 1428.48 (H) x 803.52 (V) | 1650.24 (H) x 928.26 (V) |
| | Pixel Pitch (mm) | | 0.2451 x 0.2451 | 0.285 x 0.285 | 0.315 x 0.315 | 0.372 x 0.372 | 0.42975 x 0.42975 |
| | Color Gamut | | 92% (DCI-P3, CIE1976) | 92% (DCI-P3, CIE1976) | 92% (DCI-P3, CIE1976) | 92% (DCI-P3, CIE1976) | 92% (DCI-P3, CIE1976) |
| Operation Hour | | 16/7 | 16/7 | 16/7 | 16/7 | 16/7 | |
| Connectivity / Sound | INPUT | VIDEO | HDMI 2.0 (3) | HDMI 2.0 (3) | HDMI 2.0 (3) | HDMI 2.0 (3) | HDMI 2.0 (3) |
| | | AUDIO | N/A | N/A | N/A | N/A | N/A |
| | | USB | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 | USB 2.0 x 2 |
| | | Tuner | N/A | N/A | N/A | N/A | N/A |
| | OUTPUT | VIDEO | N/A | N/A | N/A | N/A | N/A |
| | | AUDIO | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack | Stereo mini Jack |
| | | USB | N/A | N/A | N/A | N/A | N/A |
| | WiFi / BT | | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 | 0 / 0 |
| | EXTERNAL CONTROL | | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 | RS232C(in/out),RJ45 |
| | Speaker | | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch | 10W 2ch |
| Mechanical Spec | Dimension (mm) | Set | 967.5 x 557.7 x 48.3 | 1121.4 x 643.9 x 46.3 | 1235.1 x 707.9 x 46.3 | 1453.9 x 831.0 x 46.3 | 1681.1 x 960.1 x 49.7 |
| | | Package | 1095 x 676 x 151 | 1269 x 784 x 152 | 1402 x 858 x 163 | 1611 x 973 x 185 | 1871 x 1127 x 223 |
| | Weight (kg) | Set | 10 | 13.4 | 18.1 | 24.9 | 38.3 |
| | | Package | 13.3 | 17.6 | 23.6 | 33.3 | 49 |
| | VESA Mount | | 200 X 200 | 200 X 200 | 200 X 200 | 400 X 400 | 400x400 |
| | Bezel Width (mm) | | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 9.2mm(U/L/R), 11.2mm(B) | 11.5mm(U/L/R), 12.5mm(B) |
| Features | Internal Player | Operating System | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 | Tizen 6.5 |
| | | Processor | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU | Cortex A72 1.7GHz Quad-Core CPU |
| | | Storage (FDM) | 8GB | 8GB | 8GB | 8GB | 8GB |
| | Special | H/W | Symmetric Design (same with QxR) / Center IR / Temperature Sensor / Auto Level / Wi-Fi(2.4/5.0GHz dual) & BT | | | | |
| S/W | | Workspace (Microsoft365/VMWare/RDP) / Custom Home / Auto Source Switching & Recovery / Dicom Simulation Mode / Director Mode | | | | | |
| Certification | Safety | | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 | 60950-1 / 62368-1 |
| | EMC | | Class B | Class B | Class B | Class B | Class B |
| | Environment | | (TBD) | ENERGY STAR 8.0, EPEAT | ENERGY STAR 8.0, EPEAT | ENERGY STAR 8.0, EPEAT | (TBD) |
| | IP Rating | | IP5x | IP5x | IP5x | IP5x | IP5x |
| | Security | | 802.1x(WPA2 Enterprise) : EAP-TLS, EAP-TTLS, EAP-PEAP | | | | |
| Power | Power Supply | | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz | AC100 - 240 V, 50/60 Hz |
| | Power Consumption | Max[W/h] | 110 | 143 | 143 | 182 | 231 |
| | | Typical[W/h] | 79 | 91 | 96 | 124 | 174 |
| | | Sleep mode | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W | less than 0.5W |
| Operating Condition | Temperature | | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C | 0°C- 40°C |
| | Relative Humidity | | 10-80% | 10-80% | 10-80% | 10-80% | 10-80% |
| Accessories | Included | | Quick Setup Guide / Warranty Card / Power Cord / RS232C(IN) Gender / Remote Controller & Batteries | | | | |
| | Optional | Stand | Yes | Yes | Yes | Yes | Yes |
| | | Mount | Yes | Yes | Yes | Yes | Yes |
| | | Specialty | Yes | Yes | Yes | Yes | Yes |

About Samsung Electronics Co., Ltd.

Samsung Electronics Co., Ltd. inspires the world and shapes the future with transformative ideas and technologies. The company is redefining the worlds of TVs, smartphones, wearable devices, tablets, cameras, digital appliances, medical equipment, network systems, and semiconductor and LED solutions. For the latest news, please visit the Samsung Newsroom at news.samsung.com/au

Smart Signage

For more information about Samsung Crystal UHD Signage, visit www.samsung.com/au/business

Copyright © 2022 Samsung Electronics Co. Ltd. All rights reserved. Samsung is a registered trademark of Samsung Electronics Co. Ltd. Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.

2022-02