


MBB
5BB

*Transparent doubleglass module can be provided upon request.

KuDymond

HIGH EFFICIENCY MONO PERC MODULE

CS3U-380 | 385 | 390 | 395 | 400MS-AG (IEC1000V)

CS3U-380 | 385 | 390 | 395 | 400MS-AG (IEC1500V)

MORE POWER



Low power loss in cell connection



Low NMOT: $42 \pm 3 \text{ }^\circ\text{C}$
Low temperature coefficient (Pmax): $-0.36 \text{ } \% / \text{ }^\circ\text{C}$



Better shading tolerance



High PTC rating of up to: **92.27 %**

MORE RELIABLE



Lower hot spot temperature



Minimizes micro-cracks



Heavy snow load up to **8100 Pa**,
wind load up to **4000 Pa***



Fire Class **A** and **Type 3 / Type 13** certified
according to IEC 61730-2 / MST 23 and UL 1703



linear power output warranty*



enhanced product warranty on materials and workmanship*

*According to the applicable Canadian Solar Limited Warranty Statement.

MANAGEMENT SYSTEM CERTIFICATES

ISO 9001:2015 / Quality management system
ISO 14001:2015 / Standards for environmental management system
OHSAS 18001:2007 / International standards for occupational health & safety

PRODUCT CERTIFICATES*

IEC 61215 / IEC 61730: VDE / CE / MCS
UL 1703: CSA / IEC 61701 ED2: VDE / IEC 62716: VDE
Take-e-way



* As there are different certification requirements in different markets, please contact your local Canadian Solar sales representative for the specific certificates applicable to the products in the region in which the products are to be used.

CANADIAN SOLAR INC. is committed to providing high quality solar products, solar system solutions and services to customers around the world. No. 1 module supplier for quality and performance/price ratio in IHS Module Customer Insight Survey. As a leading PV project developer and manufacturer of solar modules with over 36 GW deployed around the world since 2001.


* For detailed information, please refer to the Installation Manual.

CANADIAN SOLAR INC.


Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
support@canadiansolar.com, www.canadiansolar.com/au

ENGINEERING DRAWING (mm)


Rear View

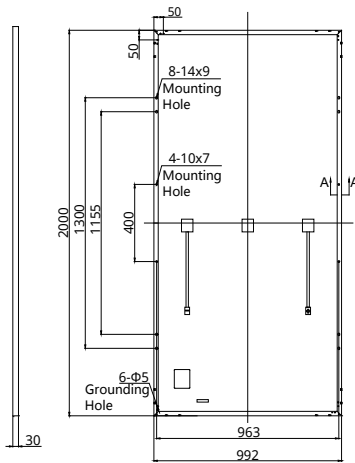


Frame Cross Section A-A



Mounting Hole



CS3U-400MS-AG / I-V CURVES

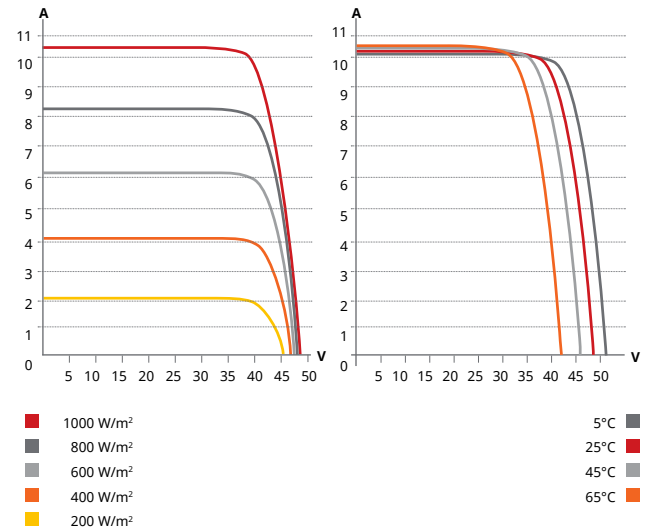

ELECTRICAL DATA | STC*

CS3U-380/385/390/395/400MS-AG

| | 380 W | 385 W | 390 W | 395 W | 400 W |
|------------------------------|---|---------|---------|---------|---------|
| Nominal Max. Power (Pmax) | 380 W | 385 W | 390 W | 395 W | 400 W |
| Opt. Operating Voltage (Vmp) | 40.0 V | 40.2 V | 40.4 V | 40.6 V | 40.8 V |
| Opt. Operating Current (Imp) | 9.50 A | 9.58 A | 9.66 A | 9.73 A | 9.81 A |
| Open Circuit Voltage (Voc) | 47.8 V | 48.0 V | 48.2 V | 48.4 V | 48.6 V |
| Short Circuit Current (Isc) | 10.01 A | 10.09 A | 10.17 A | 10.25 A | 10.33 A |
| Module Efficiency | 19.15% | 19.41% | 19.66% | 19.91% | 20.16% |
| Operating Temperature | -40°C ~ +85°C | | | | |
| Max. System Voltage | 1500V (IEC/UL) or 1000V (IEC/UL) | | | | |
| Module Fire Performance | TYPE 3 / Type 13 (UL 1703) or CLASS A (IEC61730) | | | | |
| Max. Series Fuse Rating | 30 A | | | | |
| Application Classification | Class A | | | | |
| Power Tolerance | 0 ~ + 5 W | | | | |

* Under Standard Test Conditions (STC) of irradiance of 1000 W/m², spectrum AM 1.5 and cell temperature of 25°C. Measurement uncertainty: ±3% (Pmax).

ELECTRICAL DATA | NMOT*

CS3U-380/385/390/395/400MS-AG

| | 283 W | 287 W | 290 W | 294 W | 298 W |
|------------------------------|--------|--------|--------|--------|--------|
| Nominal Max. Power (Pmax) | 283 W | 287 W | 290 W | 294 W | 298 W |
| Opt. Operating Voltage (Vmp) | 37.2 V | 37.4 V | 37.6 V | 37.8 V | 38.0 V |
| Opt. Operating Current (Imp) | 7.60 A | 7.66 A | 7.72 A | 7.78 A | 7.84 A |
| Open Circuit Voltage (Voc) | 44.8 V | 45.0 V | 45.2 V | 45.4 V | 45.6 V |
| Short Circuit Current (Isc) | 8.08 A | 8.14 A | 8.20 A | 8.27 A | 8.33 A |

* Under Nominal Module Operating Temperature (NMOT), irradiance of 800 W/m², spectrum AM 1.5, ambient temperature 20°C, wind speed 1 m/s.

* The specifications and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Canadian Solar Inc. reserves the right to make necessary adjustments to the information described herein at any time without further notice. Please be kindly advised that PV modules should be handled and installed by qualified people who have professional skills and please carefully read the safety and installation instructions before using our PV modules.

MECHANICAL DATA


| Specification | Data |
|------------------------------------|--|
| Cell Type | Mono-crystalline |
| Cell Arrangement | 144 [2X (12 X6)] |
| Dimensions | 2000 X992 X35 mm (78.7 X 39.1 X 1.38 in) |
| Weight | 26.5 kg (58.4 lbs) |
| Front / Back Glass | 2.0 mm heat strengthened glass |
| Frame | Anodized aluminium alloy |
| J-Box | IP68, 3 diodes |
| Cable | 4 mm ² (IEC), 12 AWG (UL) |
| Cable Length (Including Connector) | Portrait: 400 mm (15.7 in) (+) / 280 mm (11.0 in) (-); landscape: 1250 mm (49.2 in); leap-frog connection: 1670 mm (65.7 in)* |
| Connector | T4-PC-1 (IEC 1000 V) or PV-KST4/xy-UR, PV-KBT4/xy-UR (IEC 1000 V) or T4-PPE-1 (IEC 1500 V) or PV-KST4-EVO2/XY, PVKBT4-EVO2/XY (IEC 1500 V) or UTXC-FA4AM, UTXCMA4AM (IEC1500V) |
| Per Pallet | 30 pieces |
| Per Container (40' HQ) | 660 pieces |

* For detailed information, please contact your local Canadian Solar sales and technical representatives.

TEMPERATURE CHARACTERISTICS

| Specification | Data |
|--------------------------------------|--------------|
| Temperature Coefficient (Pmax) | -0.36 % / °C |
| Temperature Coefficient (Voc) | -0.29 % / °C |
| Temperature Coefficient (Isc) | 0.05 % / °C |
| Nominal Module Operating Temperature | 42 ± 3°C |

PARTNER SECTION

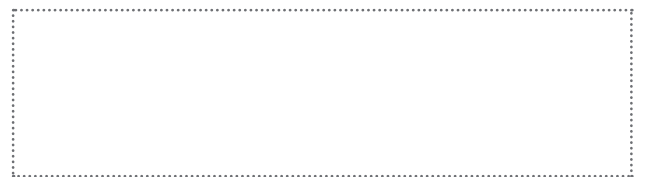

CANADIAN SOLAR INC.

Canadian Solar MSS (Australia) Pty Ltd., 44 Stephenson St, Cremorne VIC 3121, Australia
support@canadiansolar.com, www.canadiansolar.com/au

Oct. 2019. All rights reserved, PV Module Product Datasheet V5.6_AU

Manufacture in China, Thailand and Vietnam.