



HALO[®] CANLESS DOWNLIGHTING

GO CANLESS! Installs Virtually Anywhere!

- Field-Selectable color temperatures
- Installs into drywall/suspended ceiling (no housing required)
- Remote driver/junction box included
- Rated for insulated and non-IC ceilings

MORE FLEXIBILITY!
SAVE TIME AND MONEY!
NO HOUSING NEEDED!




Quick and Easy Installation



New Construction Mounting Frames CANLESS DOWNLIGHT

- Use HALO's canless mounting frames on your next new construction or remodeling project
- Toolless thumbscrews hold HALO canless remote driver/j-boxes to the mounting frame
- MF Series available in 4" and 6" rounds with 1/2" drywall collar
- HL Series available in 3", 4", 6", and 8" rounds and convert to squares with corner knockouts

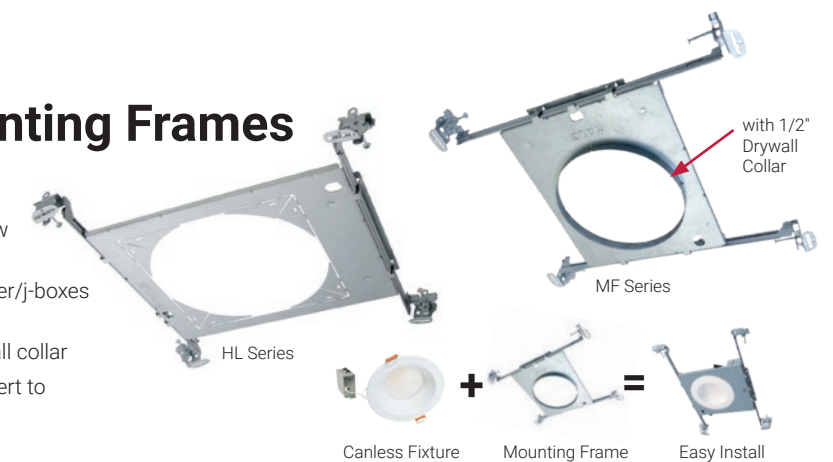

Canless
Downlighting
p. 9-19



Surface Mount
Downlighting
p. 20-23



Recessed
LED Trims
p. 24-26



Housings &
Trims
p. 27-28



Under
Cabinets
p. 29



Smart Wi-Fi
Lighting
p. 30-31

HALO[®]

RECESSED LED DOWNLIGHTS

HALO is the industry leader in high-quality recessed downlighting, offering the widest selection of innovative and flexible solutions for your application needs.

| Catalog Number | Description | UPC |
|----------------|---|--------------|
| MF4RC | 4" Round/Square Mounting Frame with 1/2" Collar | 080083268009 |
| MF6RC | 6" Round/Square Mounting Frame with 1/2" Collar | 080083268023 |
| HL3RSMF | 3" Round/Square Mounting Frame | 080083876143 |
| HL4RSMF | 4" Round/Square Mounting Frame | 080083876167 |
| HL6RSMF | 6" Round Mounting Frame | 080083876181 |
| HL8RSMF | 8" Round Mounting Frame | 080083890460 |

HALO SLIM CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE

Good Better Best

| | HLBSL & HLBE | HLBPH | HLB | HLBC | |
|----------------------|--|---|----------------------------|--|---------------------------------------|
| FEATURES/PERFORMANCE | Slim 1/2" Thin | ✓ | ✓ | ✓ + 2-in-1 Install Option (Canless-to-Can) | |
| | Size / Shape | 4" & 6" Round | 4", 6" Round | 3", 4", 6", 8", 12" Round, Square | |
| | Lens | Smooth | Smooth | Low-glare Prismatic | |
| | Max Lumens (By size @ 3000K) | 745, 1,025 | 805, 1,015 | 595, 790, 1,020, 2,350, 2,300 | 975, 1,270 (Lumen Select, Dedicated) |
| | Field SeleCCT Color Temp Switch | 3 CCT 27/30/3500K 30/40/5000K, Dedicated: 3000K | 5 CCT 27/30/35/40/5000K | 5 CCT 27/30/35/40/5000K | 5 CCT w/ D2W D2W/27/30/35/40/5000K |
| CONTROL | Dimming Phase Cut (LE/TE) / 0-10V | 10% Phase Cut | 5% Phase Cut | 5% Phase Cut, 0-10V ² | |
| | Estimated Life Hours | 35K | 50K | 50K | |
| | Input Voltage | 120V | 120V | 120V, 120-277V | |
| ACCESSORIES | Fits Mounting Frame | ✓ | ✓ | ✓ | |
| | Decorative Overlays ³ | ✓ | ✓ | ✓ ¹ | |
| | Slide-in-Side™ Wire Traps ⁴ | | ✓ | ✓ | |
| | Mounting Bar | ✓ ⁵ | ✓ | ✓ | |

¹ Round and Round-to-Square Designer Overlay Trims sold separately. ² HLBs are also available in QuickLink Low Voltage (Phase Cut or 0-10V) or Smart Wi-Fi Connected by WiZ Pro versions. ³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White. ⁴ Slide-N-Side wire traps eliminate the need to use knockouts in most instances. Pre-wire outside of the j-box, fold down the tab(s), and insert non-metallic sheathed cable into the Slide-N-Side strain relief. ⁵ Mounting Bars are included with HLBSL but are sold separately for the HLBE Bulk Packs (HLBEMOUNT-12PK).

HLBC Slim Regressed Series CANLESS DOWNLIGHT

- Standard HLBC is canless with dedicated lumens while the HLBC-LS features Lumen Select and 2-in-1 installation for fast Canless-to-Can conversion!
- Regressed baffle die-cast aluminum trim and prismatic lens improve visual comfort
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-------------------------|--------------------------------------|--------|----------------|-----------------|----------|------------------------|-------|--------------|----------------|
| HLBC4069FSD2W1EMW | 4" Downlight, Canless Only | White | 60W | 2700K-5000K+D2W | 120V | 675 | 8 | 080083263059 | 2406524 |
| HLBC4LS9FSD2W1EMWR | 4" Downlight, 2-in-1 Install | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 600-900 | 13 | 080083263097 | Pending |
| HLBC4LS9FSD2W1EMWR-CA | 4" Downlight, 2-in-1 Install, CA T20 | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 600-900 | 13 | 080083267927 | Pending |
| HLBC4LS9FSD2WE010MWR | 4" Downlight, 2-in-1 Install | White | 60-70W | 2700K-5000K+D2W | 120-277V | Lumen Select 600-900 | 13 | 080083263233 | Pending |
| HLBC4LS9FSD2WE010MWR-CA | 4" Downlight, 2-in-1 Install, CA T20 | White | 60-70W | 2700K-5000K+D2W | 120-277V | Lumen Select 600-900 | 13 | 080083267965 | Pending |
| HLBC6099FSD2W1EMW | 6" Downlight, Canless Only | White | 70W | 2700K-5000K+D2W | 120V | 1,010 | 12 | 080083263073 | Pending |
| HLBC6LS9FSD2W1EMWR | 6" Downlight, 2-in-1 Install | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 900-1,200 | 16 | 080083263219 | Pending |
| HLBC6LS9FSD2W1EMWR-CA | 6" Downlight, 2-in-1 Install, CA T20 | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 900-1,200 | 16 | 080083267941 | Pending |
| HLBC6LS9FSD2WE010MWR | 6" Downlight, 2-in-1 Install | White | 60-70W | 2700K-5000K+D2W | 120-277V | Lumen Select 900-1,200 | 16 | 080083263257 | Pending |
| HLBC6LS9FSD2WE010MWR-CA | 6" Downlight, 2-in-1 Install, CA T20 | White | 60-70W | 2700K-5000K+D2W | 120-277V | Lumen Select 900-1,200 | 16 | 080083267989 | Pending |

HLB & HLBPH Slim CANLESS DOWNLIGHT

- An ultra-thin flange and sleek downlight design that fits under any obstruction
- Two Versions: HLB-Die-cast aluminum with low-glare prismatic lens OR HLBPH-Dead-front plastic frame with smooth lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Dimming (Phase Cut or 0-10V), 50K hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-------------------|------------------------------|--------|----------------|----------------|----------|--------------------------|-------|--------------|----------------|
| HLB3059FS1EMWR | 3" Downlight, Round | White | 40W | 2700K-5000K | 120V | 575 | 9 | 080083151301 | 2370657 |
| HLB3S059FS1EMWR | 3" Downlight, Square | White | 40W | 2700K-5000K | 120V | 595 | 9 | 080083151325 | N/A |
| HLB4SP069FS1EMWR | 4" Downlight, Square | White | 65W | 2700K-5000K | 120V | 650 | 10 | 080083909667 | 2347583 |
| HLB4069FS1EMWR | 4" Downlight, Round | White | 65W | 2700K-5000K | 120V | 790 | 12 | 080083848140 | 2322243 |
| HLB6099FS1EMWR | 6" Downlight, Round | White | 70W | 2700K-5000K | 120V | 1,020 | 16 | 080083848164 | 2322242 |
| HLB6S099FS1EMWR | 6" Downlight, Square | White | 70W | 2700K-5000K | 120V | 975 | 12 | 080083863389 | 2331663 |
| HLB8169FS1EMWR | 8" Downlight, Round | White | 90W | 2700K-5000K | 120V | 1,760 | 21 | 080083150601 | 2358047 |
| HLB4069FSE010MWR | 4" Downlight, Round (0-10V) | White | 65W | 2700K-5000K | 120-277V | 790 | 11 | 080083912261 | 2351376 |
| HLB4S069FSE010MWR | 4" Downlight, Square (0-10V) | White | 65W | 2700K-5000K | 120-277V | 725 | 11 | 080083912308 | N/A |
| HLB6099FSE010MWR | 6" Downlight, Round (0-10V) | White | 70W | 2700K-5000K | 120-277V | 1,060 | 15 | 080083912285 | 2351377 |
| HLB6S099FSE010MWR | 6" Downlight, Square (0-10V) | White | 70W | 2700K-5000K | 120-277V | 975 | 15 | 080083912322 | N/A |
| HLB8LS9FSE010MWR | 8" Downlight, Round (0-10V) | White | 90-150W | 2700K-5000K | 120-277V | Lumen Select 1,400-2,400 | 31 | 080083083367 | 2358045 |
| HLB12LS9FSE010MWR | 12" Downlight, Round (0-10V) | White | 90-150W | 2700K-5000K | 120-277V | Lumen Select 1,300-2,300 | 32 | 080083088782 | N/A |
| HLBPH4069FS1EMWR | 4" Downlight, Round | White | 65W | 2700K-5000K | 120V | 805 | 10 | 080083190003 | 2385132 |
| HLBPH6099FS1EMWR | 6" Downlight, Round | White | 70W | 2700K-5000K | 120V | 1,015 | 14 | 080083190027 | 2385133 |

HLBSL & HLBE Slim Lite CANLESS DOWNLIGHT

- Offers simplified features for budget-conscious installers
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated 3000K
- Only available in HALO's dead-front plastic frame and smooth lens
- LED downlight and remote driver/junction box with mounting bar*
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------------|------------------------|--------|----------------|-------------|---------|--------|-------|--------------|---------------------------|
| HLBSL4069FS231EMWR | 4" Downlight | White | 65W | 2700K-3500K | 120V | 753 | 10 | 080083912346 | 2349484 |
| HLBSL4069FS351EMWR | 4" Downlight | White | 65W | 3000K-5000K | 120V | 735 | 10 | 080083916368 | 2349485 |
| HLBSL6099FS231EMWR | 6" Downlight | White | 70W | 2700K-3500K | 120V | 955 | 13 | 080083912360 | 2349475, 2349476, 2349477 |
| HLBSL6099FS351EMWR | 6" Downlight | White | 70W | 3000K-5000K | 120V | 950 | 13 | 080083916382 | 2349478, 2349479, 2349480 |
| HLBE4069301EMWR-12PK* | 4" Downlight (12-Pack) | White | 65W | 3000K | 120V | 740 | 10 | 080083265503 | 2405484 |
| HLBE4069301EMWR-24PK* | 4" Downlight (24-Pack) | White | 65W | 3000K | 120V | 740 | 10 | 080083265527 | 2405484 |
| HLBE6099301EMWR-12PK* | 6" Downlight (12-Pack) | White | 70W | 3000K | 120V | 1,025 | 13 | 080083265541 | 2405486 |
| HLBE6099301EMWR-24PK* | 6" Downlight (24-Pack) | White | 70W | 3000K | 120V | 1,025 | 13 | 080083265565 | 2405486 |

*HLBE: mounting bar 12 packs sold separately

HALO CANLESS DOWNLIGHT PRODUCT SELECTION GUIDE

Good Better Best



| | LT-DM | CJB | RL-DM & RL-DM Night Light | HLA | RA-DM | RL-Slope | LCR |
|--|--|--|---|---|---|---|--|
| Fixture Types | Downlights | Slim Downlight with Attached J-box/Driver + 2-in-1 Canless-to-Can Versions Available | Downlights & Downlight + Night Light | Gimbal Adjustables (30° Tilt/360° Rotation) | Gimbal Adjustables (35° Tilt/360° Rotation) | Regressed Slope Adjustable (9-45° Tilt) | Downlights, Wall Wash, DL + Emergency Battery Backup |
| Sizes (Round) | 3", 4", 6" | 4", 6" | 4", 6" | 3", 4" | 4", 6" | 4", 6" | 2", 4", 6", 8" |
| Trim & Lens | Baffle or Smooth w/Flat Lens | Single Step Regressed w/ Flat smooth Lens | Baffle w/Curved Lens (NL has Transparent Trim) | Low-glare Prismatic or Smooth Lens | Baffle w/Flat Lens | Baffle w/Integrated Optic | Smooth w/Flat Lens |
| Max Lumens (By size @ 3000K) | 570, 645, 785 | 745, 920 | 955, 1,300 (Lumen Select, Dedicated) (NL: 780, 1,020) | 710 | 790, 775 | 960, 1,630 | 835, 1,295, 3,100, 8,155 |
| Field SeleCCT Color Temp Switch | 3 CCT 27/30/3500K, 30/40/5000K, Dedicated: 3000K | 5 CCT 27/30/35/40/5000K | 5 CCT w/ D2W D2W/27/30/35/40 5000K (NL: 2000K) | 5 CCT 27/30/35/40/5000K | 5 CCT w/ D2W D2W/27/30/35/40 5000K | 5 CCT 27/30/35 40/5000K | 6 CCT 27/30/35/40 50/6500K |

| | LT-DM | CJB | RL-DM & RL-DM Night Light | HLA | RA-DM | RL-Slope | LCR |
|--|----------------------------|----------------------------|--|--------------|--------------|--------------|--|
| Dimming Phase Cut (LE/TE)/0-10V | 10% Phase Cut ¹ | 10% Phase Cut ¹ | 5% Phase Cut, 0-10V ² (NL: 5% Phase Cut-both zones) | 5% Phase Cut | 5% Phase Cut | 5% Phase Cut | 5% Dual-Dim (Phase Cut + 0-10V), 0-10V |
| Estimated Life Hours | 35K | 35K | 70K (NL: 50K) | 50K | 50K | 50K | 50K |
| Input Voltage | 120V | 120V | 120V (NL: 120V) | 120V | 120V | 120V | 120-277V |

| | LT-DM | CJB | RL-DM & RL-DM Night Light | HLA | RA-DM | RL-Slope | LCR |
|--|-------|-----|---------------------------|-----|-------|----------|-----|
| Fits Mounting Frames | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| Decorative Overlays³ | | | ✓ (RL-DM only) | | | | ✓ |
| Slide-in-Side™ Wire Traps⁴ | | | ✓ | ✓ | ✓ | ✓ | ✓ |
| Mounting Bar | ✓ | | ✓ | ✓ | ✓ | ✓ | ✓ |

¹ LT-DMs are also available in QuickLink Low Voltage (Phase Cut) versions.

² RL-DMs are also available in QuickLink Low Voltage (0-10V) versions.

³ Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White.

⁴ Slide-N-Side wire traps eliminate the need to remove knockouts. Pre-wire outside of the j-box, fold down the tab, and insert non-metallic sheathed cable into the Slide-N-Side strain relief.

RL-DM Recessed Baffle Trim CANLESS DOWNLIGHT

- The perfect balance of value and visual comfort, now available as a canless direct mount
- Die-cast aluminum baffle trim with curved lens and selectable lumen option
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-------------------|---------------------|--------|----------------|-----------------|---------|------------------------|-------|--------------|----------------|
| RL4LS9FSD2W1EWHDM | 4" Baffle Downlight | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 600-900 | 11 | 080083258901 | 2403141 |
| RL6069FSD2W1EWHDM | 6" Baffle Downlight | White | 60W | 2700K-5000K+D2W | 120V | 750 | 7 | 080083258963 | 2402947 |
| RL6LS9FSD2W1EWHDM | 6" Baffle Downlight | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 900-1,200 | 14 | 080083258987 | 2403144 |

LT-DM Recessed Baffle & Smooth Splay Trim CANLESS DOWNLIGHT

- Closely mirrors the RL-DM design, but offers simplified features for maximum savings
- Dead front plastic trim in either baffle or smooth splay with flat lens
- 3 Color Field-Selectable in 27/30/3500K or 30/40/5000K; dedicated in 3000K
- LED downlight with remote driver/junction box
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|--------------------|---------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| LT3059FS231EWHDMR | 3" Smooth Splay Downlight | White | 60W | 2700K-5000K | 120V | 550 | 7 | 080083159680 | N/A |
| LT3059FS351EWHDMR | 3" Smooth Splay Downlight | White | 60W | 3000K-5000K | 120V | 570 | 7 | 080083159628 | N/A |
| LTB4069FS351EWHDMR | 4" Baffle Downlight | White | 60W | 3000K-5000K | 120V | 625 | 8 | 080083253456 | N/A |
| LT4069FS231EWHDMR | 4" Smooth Splay Downlight | White | 60W | 2700K-5000K | 120V | 620 | 7 | 080083159925 | 2374009 |
| LT4069FS351EWHDMR | 4" Smooth Splay Downlight | White | 60W | 3000K-5000K | 120V | 645 | 7 | 080083159642 | 2374012 |
| LTB6089FS351EWHDMR | 6" Baffle Downlight | White | 65W | 3000K-5000K | 120V | 745 | 9 | 080083253470 | N/A |
| LT6089FS231EWHDMR | 6" Smooth Splay Downlight | White | 65W | 2700K-5000K | 120V | 765 | 8 | 080083159963 | 2374019 |
| LT6089FS351EWHDMR | 6" Smooth Splay Downlight | White | 65W | 3000K-5000K | 120V | 785 | 9 | 080083159666 | 2374021 |

RLS Slope Recessed Baffle

CANLESS DOWNLIGHT

- Tilt the adjustment mechanism from 9° to 45° to match ceiling pitches from 2/12 to 12/12
- Better lighting and improved visual comfort with its integrated optic and regressed light engine
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|------------------|-------------------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RLS4099FS1EWHDMR | 4" Slope Ceiling Recessed Downlight | White | 70W | 2700K-5000K | 120V | 960 | 9 | 080083282975 | 2382794 |
| RLS6159FS1EWHDMR | 6" Slope Ceiling Recessed Downlight | White | 100W | 2700K-5000K | 120V | 1,630 | 9 | 080083282999 | 2382795 |

RA-DM Baffle Trim Gimbal

CANLESS DOWNLIGHT

- Aim lighting where you want it with 360° of rotations and tilts 35°
- Regressed Baffle trim for increased cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- LED downlight with remote driver/junction box and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | Energy Star ID |
|-------------------|--------------------------------|--------|----------------|-------------------|---------|-------------------|-------|--------------|----------------|
| RA4LS9FSD2W1EWHDM | 4" Adjustable Baffle Downlight | White | 65W | 2700K-5000K + D2W | 120V | 600-900 | 9 | 080083283019 | 2351865 |
| RA6LS9FSD2W1EWHDM | 6" Adjustable Baffle Downlight | White | 65W | 2700K-5000K + D2W | 120V | 600-900 | 9 | 080083283033 | 2351876 |

HLA Adjustable Gimbal

CANLESS DOWNLIGHT

- Aim lighting where you want it with 360° of rotations and tilts 30°
- Ideal for shallow plenum spaces - requires only 1-1/2" above the ceiling
- 5 Color Field-Selectable in 27/30/35/40/5000K
- LED downlight with remote driver/junction box
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|--------------------|----------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| HLA406FL9FS1EMWR | 4" Adjustable Direct Mount | White | 60W | 2700K-5000K | 120V | 710 | 11 | 080083882960 | 2341271 |
| HLA406VWFL9FS1EMWR | 4" Adjustable Direct Mount | White | 60W | 2700K-5000K | 120V | 710 | 11 | 080083863600 | 2333844 |



RL Night Light

CANLESS & RECESSED DOWNLIGHTS

- Two Modes: Downlight for general illumination and Night Light for gentle glow (2000K)
- Dead front plastic trim with baffle trim and flat lens
- 6-Position Switch, 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K), Night Light CCT: Warm glow 2000K
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Canless LED Downlights with remote/driver/junction box

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|---------------------|----------------|--------|----------------|-----------------|---------|--------|-------|--------------|----------------|
| RLNL4079FSD2W1EWHDM | 4" Night Light | White | 60W | 2700K-5000K+D2W | 120V | 780 | 9 | 080083265039 | 2403400 |
| RLNL6109FSD2W1EWHDM | 6" Night Light | White | 60W | 2700K-5000K+D2W | 120V | 1,020 | 12 | 080083265053 | 2403403 |

Recessed LED Trims with E26 medium socket adapter, and mounting hardware (4"-friction blades and 5/6"-torsion springs & friction blades)

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-------------------|----------------|--------|----------------|-----------------|---------|--------|-------|--------------|----------------|
| RLNL4079FSD2W1EWH | 4" Night Light | White | 65W | 2700K-5000K+D2W | 120V | 775 | 8 | 080083268047 | 2409525 |
| RLNL6109FSD2W1EWH | 6" Night Light | White | 75W | 2700K-5000K+D2W | 120V | 1,065 | 11 | 080083268061 | 2409524 |

Installing downlights has never been faster.

Power multiple fixtures on the single power supply for easy and efficient lighting installation.

SAVE UP TO **85%** WIRING TIME

QuickLink Low Voltage System



HLB QuickLink Low Voltage (Phase Cut Dimming) CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



QuickLink Low Voltage System

| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | Energy Star ID |
|-------------------|---|--------------|--------|----------------|----------------|------------------------------|--------|-----------|--------------|----------------|
| HLBQL4069FS1E-4PK | Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" HLBQL Fixtures | 7 | White | 60W | 2700K-5000K | Driver: 120V Lights: QL LowV | 640 | 8 | 080083190102 | 2388203 |
| HLBQL6099FS1E-4PK | Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" HLBQL Fixtures | 6 | White | 60W | 2700K-5000K | Driver: 120V Lights: QL LowV | 975 | 12 | 080083190126 | 2388204 |
| HLBQL4069FS1E | (1) 4" HLBQL Fixture* | - | White | 60W | 2700K-5000K | QL Low Voltage | 600 | 8 | 080083190188 | N/A |
| HLBQL6099FS1E | (1) 6" HLBQL Fixture* | - | White | 60W | 2700K-5000K | QL Low Voltage | 975 | 12 | 080083190218 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

LT QuickLink Low Voltage (Phase Cut Dimming) RECESSED SMOOTH SPLAY TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Dead front plastic trim in either baffle or smooth splay and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 72W remote power supply & 35-ft of low voltage cable + (4) downlights included



QuickLink Low Voltage System

| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | Energy Star ID |
|-------------------|--|--------------|--------|----------------|----------------|------------------------------|--------|-----------|--------------|----------------|
| LTQL4069S1EDM-4PK | Kit: (1) Remote Power Supply & 35-ft of cable + (4) 4" LTQL Fixtures | 8 | White | 60W | 2700K-5000K | Driver: 120V Lights: QL LowV | 675 | 8 | 080083190140 | 2388205 |
| LTQL6069S1EDM-4PK | Kit: (1) Remote Power Supply & 35-ft of cable + (4) 6" LTQL Fixtures | 8 | White | 60W | 2700K-5000K | Driver: 120V Lights: QL LowV | 825 | 8 | 080083190164 | 2388206 |
| LTQL4069S1EDM | (1) 4" LTQL Fixture* | - | White | 60W | 2700K-5000K | QL Low Voltage | 675 | 8 | 080083190232 | N/A |
| LTQL6069S1EDM | (1) 6" LTQL Fixture* | - | White | 60W | 2700K-5000K | QL Low Voltage | 825 | 8 | 080083190256 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system.

HALO canless commercial downlights with a 120-277V remote driver/junction box positioned as HALO's light commercial solution for new construction and remodel applications.



HLB QuickLink Low Voltage (0-10V Dimming) SLIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum with low-glare prismatic lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 40-ft of low voltage cable + (6) downlights included



QuickLink Low Voltage System

| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | Energy Star ID |
|---------------------|---|--------------|--------|----------------|----------------|----------------------------------|--------|-----------|--------------|----------------|
| HLBQL4069FSE010-6PK | Kit: (1) Remote Power Supply & 40-ft of cable + (6) 4" HLBQL Fixtures | 11 | White | 60W | 2700K-5000K | Driver: 120-277V Lights: QL LowV | 605 | 8 | 080083182206 | 2388712 |
| HLBQL6099FSE010-6PK | Kit: (1) Remote Power Supply & 40-ft of cable + (6) 6" HLBQL Fixtures | 7 | White | 60W | 2700K-5000K | Driver: 120-277V Lights: QL LowV | 935 | 12 | 080083182220 | 2388713 |
| HLBQL4069FSE010 | (1) 4" HLBQL Fixture* (Commercial) | - | White | 60W | 2700K-5000K | QL Low Voltage | 605 | 8 | 080083182367 | N/A |
| HLBQL6099FSE010 | (1) 6" HLBQL Fixture* (Commercial) | - | White | 60W | 2700K-5000K | QL Low Voltage | 935 | 12 | 080083182381 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

RL QuickLink Low Voltage (0-10V Dimming) RECESSED BAFFLE TRIM CANLESS DOWNLIGHT

- Fixtures twist-connect to low voltage cable, powered by a remote driver/junction box
- Die-cast aluminum baffle trim and curved lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- (1) 90W remote power supply & 50-ft of low voltage cable + (8) downlights included



QuickLink Low Voltage System

| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | Energy Star ID |
|---------------------|---|--------------|--------|----------------|----------------|----------------------------------|--------|-----------|--------------|----------------|
| RLQL4069SE010DM-8PK | Kit: (1) Remote Power Supply & 50-ft of cable + (8) 4" RLQL Fixtures (Commercial) | 13 | White | 60W | 2700K-5000K | Driver: 120-277V Lights: QL LowV | 620 | 7 | 080083182282 | 2388378 |
| RLQL6069SE010DM-8PK | Kit: (1) Remote Power Supply & 50-ft of cable + (8) 6" RLQL Fixtures (Commercial) | 13 | White | 60W | 2700K-5000K | Driver: 120-277V Lights: QL LowV | 665 | 7 | 080083182305 | 2388389 |
| RLQL4069SE010DM | (1) 4" RLQL Fixture* Commercial | - | White | 60W | 2700K-5000K | QL Low Voltage | 620 | 7 | 080083182442 | N/A |
| RLQL6069SE010DM | (1) 6" RLQL Fixture* Commercial | - | White | 60W | 2700K-5000K | QL Low Voltage | 665 | 7 | 080083182466 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120-277V system.

LCR Light Commercial Series

CANLESS DOWNLIGHT

- Redesigned with dual-dimming, additional CCT selectability and lumen packages, designer trims color options and new wall wash or emergency battery backup versions
- Die-cast aluminum smooth splay trim and flat lens (downlight and wall wash versions)
- 6 Color Field-Selectable in 27/30/35/40/50/6500K
- LED downlight with remote driver/junction box
- 5% Dual Dim: 0-10V or Phase Cut (LE/TE), 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|--------------|--------|----------------|----------------|----------|--------|-------|--------------|----------------|
| LCR208RD9FSE020 | 2" Downlight | White | 70W | 2700K-6500K | 120-277V | 835 | 10 | 080083259144 | 2405806 |
| LCR408RD9FSE020 | 4" Downlight | White | 70W | 2700K-6500K | 120-277V | 890 | 11 | 080083261505 | 2405430 |
| LCR412RD9FSE020 | 4" Downlight | White | 75W | 2700K-6500K | 120-277V | 1,295 | 14 | 080083261567 | 2405436 |
| LCR615RD9FSE020 | 6" Downlight | White | 75W | 2700K-6500K | 120-277V | 1,610 | 18 | 080083261628 | 2405442 |
| LCR621RD9FSE020 | 6" Downlight | White | 150W | 2700K-6500K | 120-277V | 2,100 | 23 | 080083261680 | 2405603 |
| LCR630RD9FSE010 | 6" Downlight | White | 150W | 2700K-6500K | 120-277V | 3,100 | 30 | 080083261741 | 2405609 |
| LCR810RD9FSE020 | 8" Downlight | White | 75W | 2700K-6500K | 120-277V | 1,090 | 12 | 080083261789 | 2405807 |
| LCR830RD9FSE010 | 8" Downlight | White | 150W | 2700K-6500K | 120-277V | 3,150 | 35 | 080083261826 | 2405809 |
| LCR850RD9FSE010 | 8" Downlight | White | 150W | 2700K-6500K | 120-277V | 5,180 | 55 | 080083261864 | 2405810 |
| LCR880RD9FSE010 | 8" Downlight | White | 200W | 2700K-6500K | 120-277V | 8,155 | 92 | 080083261901 | 2405812 |

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|-----------------------------|--------|----------------|----------------|----------|--------|-------|--------------|----------------|
| LCR408WW9FSE020 | 4" Wall Wash (Damp-listed)h | White | 70W | 2700K-6500K | 120-277V | 835 | 10 | 080083259182 | 2405431 |
| LCR412WW9FSE020 | 4" Wall Wash (Damp-listed) | White | 75W | 2700K-6500K | 120-277V | 1,255 | 14 | 080083261543 | 2405437 |
| LCR615WW9FSE020 | 6" Wall Wash (Damp-listed) | White | 75W | 2700K-6500K | 120-277V | 1,520 | 18 | 080083261604 | 2405598 |
| LCR621WW9FSE020 | 6" Wall Wash (Damp-listed) | White | 150W | 2700K-6500K | 120-277V | 2,125 | 23 | 080083261666 | 2405601 |
| LCR630WW9FSE010 | 6" Wall Wash (Damp-listed) | White | 150W | 2700K-6500K | 120-277V | 2,970 | 32 | 080083261727 | 2405611 |

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|--------------------------------|--------|----------------|----------------|----------|--------|-------|--------------|----------------|
| LCR408RD9FSE040 | 4" Downlight + Emergency Batt. | White | 70W | 2700K-6500K | 120-277V | 890 | 10.7 | 080083259168 | 2405429 |
| LCR412RD9FSE040 | 4" Downlight + Emergency Batt. | White | 75W | 2700K-6500K | 120-277V | 1,295 | 14.4 | 080083261529 | 2405434 |
| LCR615RD9FSE040 | 6" Downlight + Emergency Batt. | White | 75W | 2700K-6500K | 120-277V | 1,610 | 17.5 | 080083261581 | 2405442 |
| LCR621RD9FSE040 | 6" Downlight + Emergency Batt. | White | 150W | 2700K-6500K | 120-277V | 2,100 | 23 | 080083261642 | 2405601 |
| LCR630RD9FSE040 | 6" Downlight + Emergency Batt. | White | 150W | 2700K-6500K | 120-277V | 3,100 | 31.6 | 080083261703 | 2405607 |
| LCR810RD9FSE040 | 8" Downlight + Emergency Batt. | White | 75W | 2700K-6500K | 120-277V | 1,090 | 12 | 080083261765 | 2405800 |
| LCR830RD9FSE040 | 8" Downlight + Emergency Batt. | White | 150W | 2700K-6500K | 120-277V | 3,150 | 33 | 080083261802 | 2405809 |
| LCR850RD9FSE040 | 8" Downlight + Emergency Batt. | White | 150W | 2700K-6500K | 120-277V | 5,180 | 50 | 080083261840 | 2405802 |
| LCR880RD9FSE040 | 8" Downlight + Emergency Batt. | White | 200W | 2700K-6500K | 120-277V | 8,155 | 92 | 080083261888 | 2405812 |

CJB Integrated JBox

CANLESS DOWNLIGHT

- Slim design 4" and 6" LED recessed downlights for easy installation from below the ceiling
- 2-in-1 installation for either canless or LED trim retrofit
- 4" delivers 600 lumens; 6" delivers 900 lumens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- 10% Phase Cut Dimming (LE/TE), 35K hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|--------------------|--|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| CJB4069FS1EMW | 4" Downlight, Canless Only | White | 40W | 2700K-5000K | 120V | 600 | 8 | 080083266234 | 2508445 |
| CJB6099FS1EMW | 6" Downlight, Canless Only | White | 60W | 2700K-5000K | 120V | 900 | 9 | 080083266258 | 2508446 |
| CJB4069FS1EMWR | 4" Downlight, 2-in-1 Install | White | 40W | 2700K-5000K | 120V | 600 | 8 | 080083266470 | Pending |
| CJB6099FS1EMWR | 6" Downlight, 2-in-1 Install | White | 60W | 2700K-5000K | 120V | 900 | 9 | 080083266494 | Pending |
| CJB4069FS1EMW-6PK | 4" Downlight (6-Pack), Canless Only | White | 40W | 2700K-5000K | 120V | 600 | 8 | 080083266272 | 2508445 |
| CJB6099FS1EMW-6PK | 6" Downlight (6-Pack), Canless Only | White | 60W | 2700K-5000K | 120V | 900 | 9 | 080083266296 | 2508446 |
| CJB4069FS1EMWR-6PK | 4" Downlight, 2-in-1 Install (6-Pack) | White | 40W | 2700K-5000K | 120V | 600 | 8 | 080083266517 | Pending |
| CJB6099FS1EMWR-6PK | 6" Downlight, 2-in-1 Install (6-Pack) | White | 60W | 2700K-5000K | 120V | 900 | 9 | 080083266531 | Pending |
| CJB4069FS1EMW-12PK | 4" Downlight (12-Pack), Canless Only | White | 40W | 2700K-5000K | 120V | 600 | 8 | 080083266418 | 2508445 |
| CJB6099FS1EMW-12PK | 6" Downlight (12-Pack), Canless Only | White | 60W | 2700K-5000K | 120V | 900 | 9 | 080083266432 | 2508446 |
| CJB4069FS1EMWR-12P | 4" Downlight, 2-in-1 Install (12-Pack) | White | 40W | 2700K-6500K | 120V | 600 | 8 | 080083266555 | Pending |
| CJB6099FS1EMWR-12P | 6" Downlight, 2-in-1 Install (12-Pack) | White | 60W | 2700K-6500K | 120V | 900 | 9 | 080083266579 | Pending |

HALO® Remodel Solutions | Go Faster! with HALO Canless EZ-Trim

- FASTER INSTALLATION**
Lower installation costs than the traditional HALO remodeling housing
- FEWER COMPONENTS**
Easier ordering and less boxes than the traditional HALO remodeling housing
- COMPLETE SELECTION**
3, 4, 6-inch and shallow options
[Click to watch installation video](#)

EZ-Trim CANLESS DOWNLIGHT




| Catalog Number | Description | Finish | Lamp Base | UPC |
|-------------------|-----------------------------|--------|-----------|--------------|
| CEZ4125GU10WBICAT | 4" Canless EZ-Trim | White | GU10 | 080083175536 |
| CEZ4125E26WBICAT | 4" Canless EZ-Trim | White | E26 | 080083175550 |
| CEZ6125E26WBICAT | 6" Canless EZ-Trim | White | E26 | 080083176212 |
| CEZ6125GU24WBICAT | 6" Canless EZ-Trim | White | GU24 | 080083175574 |
| CEZ6126E26WBICAT | 6" Canless EZ-Trim, Shallow | White | E26 | 080083176236 |
| CEZ6126GU24WBICAT | 6" Canless EZ-Trim, Shallow | White | GU24 | 080083175598 |

HALO[®] RECESSED LED TRIMS

Maximum energy savings with easy installation

- Compatible with most recessed housings and sizes
- Suitable for new construction and remodel
- Replaces traditional incandescent lighting

Quick and Easy Installation

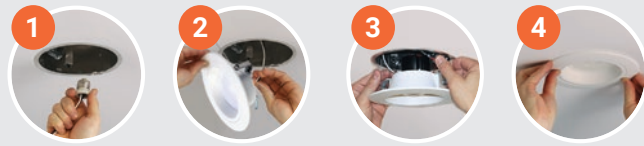

HALO RECESSED LED TRIMS

RL Recessed Baffle LED TRIMS

- Delivers long life, exceptional performance, and installs into almost any recessed housing
- The die-cast aluminum baffle trim reduces glare and provides a traditional downlight appearance
- 6-Position Switch: 5 Color Field-Selectable in 27/30/35/40/5000K + Dim-to-Warm (3000K dims to 1800K)
- Includes LED Trim, E26 medium socket adapter and mounting hardware (3" & 4"-friction blades and 5/6"-torsion springs & friction blades)
- 5% Phase Cut (LE/TE) Dimming, 70,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|------------------|------------------|--------|----------------|-----------------|---------|------------------------|-------|--------------|----------------|
| RL3059FSD2W1EWH | 3" Baffle Trim | White | 60W | 2700K-5000K+D2W | 120V | 610 | 8 | 080083257669 | 2402944 |
| RL4LS9FSD2W1EWH | 4" Baffle Trim | White | 60-70W | 2700K-5000K+D2W | 120V | Lumen Select 600-900 | 9 | 080083257683 | 2402940 |
| RL56069FSD2W1EWH | 5/6" Baffle Trim | White | 60W | 2700K-5000K+D2W | 120V | 700 | 8 | 080083818525 | 2356074 |
| RL56LS9FSD2W1EWH | 5/6" Baffle Trim | White | 60-75W | 2700K-5000K+D2W | 120V | Lumen Select 900-1,200 | 12 | 080083818549 | 2354587 |

HALO RECESSED LED TRIM PRODUCT SELECTION GUIDE

Good Better Best



| | LT | LA | RL | RL Night Light | RA | RSQ |
|--|---|---|------------------------------------|--|---|-------------------------|
| LED Trim Type | Downlights | Gimbal Adjustables (35° Tilt/360° Rotation) | Downlights | Downlights | Gimbal Adjustables (35° Tilt/360° Rotation) | Square Downlights |
| Size & Shape | 4", 5/6" Round | 4", 5/6" Round | 3", 4", 5/6" Round | 4", 5/6" Round | 4", 5/6" Round | 4", 5", 6" Square |
| Trim & Lens | Baffle or Smooth w/ Flat Lens | Baffle w/ Flat Lens | Baffle w/ Curved Lens | Baffle w/ Curved Lens + Transparent Trim | Baffle w/ Flat Lens | Baffle w/ Flat Lens |
| Max Lumens (By size @ 3000K) | 570, 645, 785 | 955, 1,300 (Lumen Select, Dedicated) | 780, 1,020 | 775, 1,065 | 710 | 790, 775 |
| Field SeleCCT Color Temp Switch | 5 CCT 27/30/35/40/5000K 3 CCT 27/30/3500K or 30/40/50K Dedicated: 3000K | Dedicated 3000K | 5 CCT w/ D2W D2W 27/30/35/40 5000K | 5 CCT w/ D2W D2W/27/30/35 40/5000K + Night Light (2000K) | 5 CCT w/ D2W D2W 27/30/35/40 5000K | 5 CCT 27/30/35 40/5000K |

| CONTROL | Dimming Phase Cut (LE/TE) | 10% | 10% | 5% ¹ | 5% (Both Zones) | 5% | 5% |
|---------|-----------------------------|------|------|-----------------|-----------------|------|------|
| | Estimated Life Hours | 50K | 35K | 70K | 50K | 50K | 50K |
| | Input Voltage | 120V | 120V | 120V | 120V | 120V | 120V |

| HARDWARE | Decorative Overlays ² | | | ✓ | | | ✓ |
|----------|----------------------------------|--|--|---|--|--|---|
|----------|----------------------------------|--|--|---|--|--|---|

¹ RL LED Trims are also available in Smart Wi-Fi Connected by WiZ Pro versions

² Matte Black, Tuscan Bronze, Satin Nickel, Paintable Matte White

LT Recessed Baffle or Smooth Splay LED TRIMS

- The LT LED trims offer a cost-saving alternative to the RL Series that retrofit into recessed housings
- Dead-front plastic fixture with either baffle or smooth splay trims and smooth flat lens
- Available in 3 or 5 Color Field-Selectable or Dedicated 3000K
- Includes E26 medium socket adapter and mounting hardware (4"-friction blades; 5/6"-torsion springs only fit housings with spring receivers)
- 10% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



Selectable 5-CCT

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| LT4069FS1EWHR | 4" Baffle Trim | White | 60W | 2700K-5000K | 120V | 680 | 7 | 080083283965 | 2508121 |
| LT4099FS1EWHR | 4" Baffle Trim | White | 60W | 2700K-5000K | 120V | 1030 | 9 | 080083284009 | 2508243 |
| LT56079FS1EWHR | 5/6" Baffle Trim | White | 60W | 2700K-5000K | 120V | 805 | 7 | 080083284047 | 2508127 |
| LT56129FS1EWHR | 5/6" Baffle Trim | White | 75W | 2700K-5000K | 120V | 1345 | 12 | 080083284085 | 2508244 |

Dedicated CCT & Lumens

| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|--------------------------|--------|----------------|-------|---------|--------|-------|--------------|------------------|
| LT460WH6930R | 4" Baffle Trim | White | 60W | 3000K | 120V | 620 | 8 | 080083746163 | 2309297 |
| LT460WH6930R-CA | 4" Baffle Trim, CA T20 | White | 60W | 3000K | 120V | 665 | 7 | 080083900893 | 2257770, 2277227 |
| LT560WH6930R | 5/6" Baffle Trim | White | 60W | 3000K | 120V | 750 | 10 | 080083746187 | 2309300 |
| LT560WH6930R-CA | 5/6" Baffle Trim, CA T20 | White | 60W | 3000K | 120V | 745 | 8 | 080083900954 | 2252183, 2277232 |

RA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed die-cast aluminum baffle trim reduces glare and improves cutoff
- 6-Position Switch: 5-Color Field-Selectable (27/30/35/40/5000K) + Dim-to-Warm (3000K dims to 1800K)
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | Energy Star ID |
|------------------|-----------------------------|--------|----------------|-------------------|---------|-------------------|-------|--------------|----------------|
| RA4LS9FSD2W1EWH | 4" Adjustable Gimbal Trim | White | 60W | 2700K-5000K + D2W | 120V | 600-900 | 9 | 080083282975 | 2567964 |
| RA56LS9FSD2W1EWH | 5/6" Adjustable Gimbal Trim | White | 60W | 2700K-5000K + D2W | 120V | 600-900 | 9 | 080083282999 | 2567965 |

LA Baffle Adjustable Gimbal

CANLESS ADJUSTABLE

- Adjustable retrofit with 360° of rotation and 35° tilt
- Regressed dead front plastic baffle trim for increased cutoff and maximum adjustability
- Available in dedicated 3000K only
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 10% Phase Cut (LE/TE) Dimming, 35,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|-----------------------------|--------|----------------|-------|---------|--------|-------|--------------|----------------|
| LA4069301EWH | 4" Adjustable Gimbal Trim | White | 60W | 3000K | 120V | 610 | 9 | 080083818143 | 2325616 |
| LA56069301EWH | 5/6" Adjustable Gimbal Trim | White | 60W | 3000K | 120V | 635 | 9 | 080083818242 | 2325606 |

RSQ Square Recessed Baffle

TRIMS

- Provides integrated LED trims with a square baffle trim and lens
- Features die-cast aluminum square baffle trim and flat lens
- 5 Color Field-Selectable in 27/30/35/40/5000K
- Adjustable LED Trim, E26 medium socket adapter, and mounting hardware included
- 5% Phase Cut (LE/TE) Dimming, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|-----------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RSQ4089FS1EMWWB | 4" Square Baffle Trim | White | 65W | 2700K-5000K | 120V | 830 | 10 | 080083824496 | 2333094 |
| RSQ5089FS1EMWWB | 5" Square Baffle Trim | White | 70W | 2700K-5000K | 120V | 830 | 10 | 080083824595 | 2333267 |
| RSQ6089FS1EMWWB | 6" Square Baffle Trim | White | 70W | 2700K-5000K | 120V | 860 | 10 | 080083824694 | 2333093 |

HALO Housing Contractor Packs

HALO Housing Contractor Pack quantities are quick, convenient and easy to order.

E Series Housings

Compact and efficient housings for new or retrofit residential or light commercial construction.

- Ideal for residential and light commercial applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



| Catalog Number* | Description | Socket | Voltage | Qty Per Single Catalog Number | Qty of Cartons | UPC |
|-----------------|--|-------------------------------|----------|-------------------------------|----------------|--------------|
| E4ICATSB-60 | 4" IC, Shallow, New Construction | E26 | 120V | 60 Housings | 10 cartons | 080083253968 |
| E5ICATNB-60 | 5" IC, Air-Tite, New Construction, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083254071 |
| E27ICAT-60 | 6", IC, Shallow, New Construction | E26 | 120V | 60 Housings | 10 cartons | 080083254064 |
| E750ICAT-60 | 6" IC, Air-Tite, LED New Construction | LED Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083254033 |
| E7ICAT-60 | 6" IC, Air-Tite, New Construction | E26 | 120V | 60 Housings | 10 cartons | 080083253944 |
| E7ICATNB-60 | 6" IC, Air-Tite, New Construction, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083253951 |
| E7RICAT-60 | 6" IC, Air-Tite, Remodel | E26 | 120V | 60 Housings | 10 cartons | 080083254019 |

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

H Series Housings

The industry standard recessed housing for commercial and residential applications.

- Ideal for commercial and residential applications
- Compatible with Recessed LED Trims or E26 socket-based lamps
- Optimized and listed for EISA compliant tungsten-halogen lamps along with incandescent, CFL, and LED lamps with E26 bases
- For installation in insulated (IC) and non-IC rated ceilings
- Available in 120V or 120-277V configurations



| Catalog Number* | Description | Socket | Voltage | Qty Per Single Catalog Number | Qty of Cartons | UPC |
|-----------------|---|-------------------------------|----------|-------------------------------|----------------|--------------|
| H245ICAT-60 | 4" New Construction Ultra Shallow | LED Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083253982 |
| H245RICAT-60 | 4" Remodel Ultra Shallow | LED Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083254057 |
| H995ICAT-60 | 4" New Construction, IC Air-Tite, Shallow | LED Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083254040 |
| H99ICAT-60 | 4" New Construction, IC Air-Tite, Shallow | E26 | 120V | 60 Housings | 10 cartons | 080083254002 |
| H750ICAT-60 | 6" New Construction, IC Air-Tite | LED Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083254026 |
| H7ICAT-60 | 6" New Construction, IC Air-Tite | E26 | 120V | 60 Housings | 10 cartons | 080083253975 |
| H7ICATNB-60 | 6" New Construction, IC Air-Tite, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083253999 |
| H7ICT-60 | 6" New Construction, IC | E26 | 120V | 60 Housings | 10 cartons | 080083254088 |

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

Traditional Recessed Trims

4", 5" AND 6"

- Traditional recessed trims install into recessed housings, are offered in a variety of styles, and accept different lamp types
- Trims shape light to minimize glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction or remodel housings



| Catalog Number | Description | Finish | Lamp Source | UPC |
|----------------|--|--------|------------------------|--------------|
| 4001WB | 4" Step Baffle - Plastic | White | Halogen, INC, LED, CFL | 080083745869 |
| 993W | 4" Coilex Baffle | White | Halogen, INC, LED, CFL | 080083628483 |
| 5001P | 5" Metal Splay Baffle | White | Halogen, INC, LED, CFL | 662400602729 |
| 5125WB | 5" Full Cone Baffle | White | Halogen, INC, LED, CFL | 080083743162 |
| 300P | 6" Open - Socket Supporting | White | Halogen, INC, LED, CFL | 662400302421 |
| 30WAT | 6" Air-Tite Baffle | White | Halogen, INC, LED, CFL | 662400603320 |
| 310W | 6" Coilex Baffle | White | Halogen, INC, LED, CFL | 080083515882 |
| 456W | 6" Baffle for Slope Ceiling | White | Halogen, INC, LED, CFL | 662400676287 |
| 6100WB | 6" Tapered Metal Baffle, 2-Rings Narrow & Wide | White | Halogen, INC, LED, CFL | 080083743452 |
| 6125WB | 6" Full Cone Baffle | White | Halogen, INC, LED, CFL | 080083754465 |




Sleek and Seamless

This low-profile design remains invisible to the eye while providing uniform illumination on the task. With maximum energy savings and contractor friendly installation features, the HU11 series is ideal for commercial and residential projects.



HU11 LED Under Cabinet

Selectable CCT

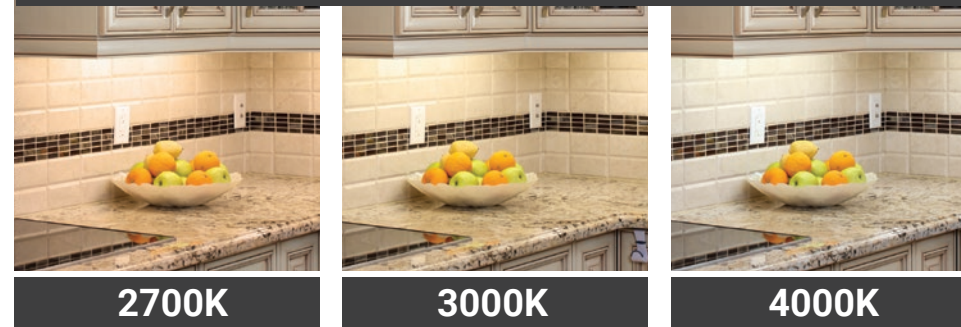


With a simple slide of the SeleCCTable color temperature switch, users have the flexibility to choose between 2700K, 3000K and 4000K CCT to customize the color temperature to suit their specific lighting need.

HU11 Under Cabinet

9", 18", 24" AND 36"

- Sleek, low-profile LED under cabinet with less than 1" profile
- 3 Color Field-Selectable options 2700K/3000K/4000K
- 5% Phase Cut (LE/TE) Dimming, 90+ CRI

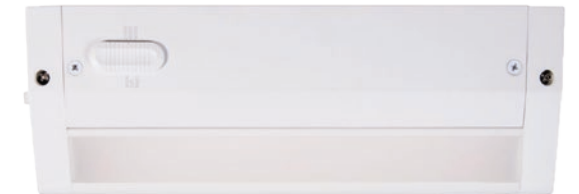

| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|-------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| HU1109D9SP | 9" Under Cabinet | White | 17W INC | 2700K-4000K | 120V | 300 | 5 | 080083875788 | 2341224 |
| HU1118D9SP | 18" Under Cabinet | White | 33W INC | 2700K-4000K | 120V | 560 | 8 | 080083875863 | 2341217 |
| HU1124D9SP | 24" Under Cabinet | White | 44W INC | 2700K-4000K | 120V | 785 | 11 | 080083875948 | 2341218 |
| HU1136D9SP | 36" Under Cabinet | White | 56W INC | 2700K-4000K | 120V | 1,125 | 16 | 080083876020 | 2341219 |

Live Smarter in Full Color



- Wireless Dimming
- Wet or Damp Locations
- Standard E26 Base
- 90 CRI Shows Natural Colors
- Wi-Fi Connected
- 93° Very Wide Angle



Circadian Rhythm



16 Million Colors



Tunable White



HALO is now available with WiZ Pro!

Illuminate spaces with the perfect lighting. Set the mood with 16 million colors + white tuning using the WiZ App or preferred compatible voice assistant.

WiZ Pro also provides features and tools installers need to setup and manage multiple projects with speed and efficiency.



DIY SETUP

Anyone can claim and control lights over Wi-Fi using the WiZ App.



PRO SETUP

The WiZ Pro Setup App allows installers to do pre-Wi-Fi claiming, manage multiple projects and access the WiZ Pro Dashboard for more advanced features.



WIZclick FEATURE

Toggle your switch to change between 2 scenes

Integrations



RL Smart Wi-Fi Recessed Baffle LED TRIM (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|------------------|--|--------|---|---------|--------|-------|--------------|----------------|
| RL4069WZRGBWWHR | 4" Smart Wi-Fi Baffle Trim (WiZ Pro) | White | Full Color & Tunable White (2200-6500K) | 120V | 615 | 8 | 080083256167 | Pending |
| RL56069WZRGBWWHR | 5/6" Smart Wi-Fi Baffle Trim (WiZ Pro) | White | Full Color & Tunable White (2200-6500K) | 120V | 690 | 8 | 080083256143 | Pending |



HLB Smart Wi-Fi Slim

CANLESS LED DOWNLIGHTS (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED downlight with remote driver/junction box and mounting hardware included
- Wi-Fi Control and Dimming to 5% via WiZ App, 50,000 hrs, 90+ CRI



| Catalog Number | Description | Finish | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|------------------|------------------------------------|--------|---|---------|--------|-------|--------------|----------------|
| HLB4069WZRGBWMWR | 4" Smart Wi-Fi Downlight (WiZ Pro) | White | Full Color & Tunable White (2200-6500K) | 120V | 600 | 9 | 080083255955 | 2408244 |
| HLB6099WZRGBWMWR | 6" Smart Wi-Fi Downlight (WiZ Pro) | White | Full Color & Tunable White (2200-6500K) | 120V | 960 | 12 | 080083255931 | 2408245 |



ESF Smart Wi-Fi Floodlight

OUTDOOR SECURITY (CONNECTED BY WIZ PRO)

- Set up from the WiZ app to wirelessly control lighting temperature, color, dimming and scenes along with home automation
- Fixtures provide 16 million colors and tunable white light from 2200-6500K
- LED floodlight with minimal design, perfect for security and ambiance outdoors
- WiFi Control and Dimming via WiZ app, 50,000 hrs, wet location rated, up to 2000 lumens

| Catalog Number | Description | Finish | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|-----------------|--|--------|---|---------|--------|-------|--------------|----------------|
| ESF2ARGBWFB-WIZ | 4" Smart Wi-Fi Baffle Trim (WiZ Pro) | Black | Full Color & Tunable White (2200-6500K) | 120V | 2200 | 28 | 080083260300 | Pending |
| ESF2ARGBWFW-WIZ | 5/6" Smart Wi-Fi Baffle Trim (WiZ Pro) | White | Full Color & Tunable White (2200-6500K) | 120V | 2200 | 28 | 080083260324 | Pending |





PR Series Downlights p. 33-35



HC Series Downlights p. 33-35

HALO[®] COMMERCIAL LED DOWNLIGHTS

Commercial LED Lighting provides the right balance of visual comfort and energy efficiency, with proven and tested products that always meet commercial code and never break the budget.

HALO COMMERCIAL DOWNLIGHTING

PR4 SeleCCTable™ Series DOWNLIGHT

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field-Selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Exclusive medium / wide beam distribution reversible flip lens



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | Energy Star ID |
|----------------|-----------------|-------------|----------------|----------------|----------|-------------------|-------|--------------|----------------|
| PR4FS12D010 | 4" Housing | Raw Finish | 18W-32W CFL | N/A | 120-277V | 1,000-2,000 | 20 | 080083131839 | 2353549 |
| PR4M12MD8FSMW | 4" LED Module | Matte White | 18W-32W CFL | 3000K-4000K | 120-277V | 1,000-2,000 | N/A | 080083060795 | 2353549 |
| PR4RFS12D010 | 4" Retrofit Kit | Raw Finish | 18W-32W CFL | N/A | 120-277V | 1,000-2,000 | 22 | 080083132683 | 2353549 |

Complete downlight includes housing or retrofit kit + LED Module.

PR6 SeleCCTable™ Series DOWNLIGHT

- 6-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field selectable lumens: 1,000, 1,500, 2,000
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Medium / wide beam distribution lens options included



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | Energy Star ID |
|----------------|-----------------|-------------|----------------|----------------|-----------|-------------------|-------|--------------|------------------|
| PR6FS12D010 | 6" Housing | Raw Finish | 18W-32W CFL | N/A | 120/277V | 1,000-2,000 | 21 | 080083892174 | 2328770 |
| PR6M12MD8FSMW | 6" LED Module | Matte White | 18W-32W CFL | 3000K-4000K | N/A | 1,000-2,000 | N/A | 080083891122 | 2345484 |
| PR6RFS12D010 | 6" Retrofit Kit | Raw Finish | 18W-32W CFL | N/A | 120V-277V | 1,000-2,000 | 22 | 080083891726 | 2345457, 2345484 |

Complete downlight includes housing or retrofit kit + LED Module.

PR8 SeleCCTable™ Series DOWNLIGHT

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- 3 Color Selectable in 30/35/4000K; 80 CRI
- Universal input 120V-277V with 0-10V 1% dimming
- Medium and wide interchangeable lens options



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|-----------------|--------------|----------------|----------------|----------|-------------|-------|--------------|----------------|
| PR820D010 | 8" Housing | Raw Finish | 18W-32W CFL | 3000K-4000K | 120-277V | 2,000 | 22 | 080083771769 | 2289673 |
| PR8M12MDMW | 8" LED Module | Matte Finish | 18W-32W CFL | 3000K-4000K | 120-277V | 1,000-2,000 | N/A | 080083772926 | 2289581 |
| PR8R20D010 | 8" Retrofit Kit | Raw Finish | 18W-32W CFL | 3000K-4000K | 120-277V | 2,000 | 22 | 080083772179 | 2289681 |

Complete downlight includes housing or retrofit kit + LED Module.

HC4 Downlight Series DOWNLIGHT

- 4-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|---------------|----------------------------|-----------------------|-------|----------|-----------|-------------------------------|--------------|----------------|
| HC410D010 | 4" Housing | Raw Finish | 75W INC, 18-26W CFL | N/A | 120-227V | 1,000 | 10.1W at 120V, 10.9W at 277V | 080083860586 | 2331377 |
| HC415D010 | 4" Housing | Raw Finish | 100W INC, 26-32W CFL | N/A | 120-277V | 1,500 | 14.2W at 120V, 14.9W at 277V | 080083860609 | 2340373 |
| HC420D010 | 4" Housing | Raw Finish | 150W INC, 32W-42W CFL | N/A | 120-227V | 2,000 | 21.1W at 120V, 21.4W at 277 V | 080083860623 | 2331586 |
| HM40525835 | 4" LED Module | White | N/A | 3500K | 120-227V | 500-2,500 | N/A | 080083213948 | N/A |
| 41MDH | 4" Reflector | Semi-Specular Clear (Haze) | N/A | N/A | N/A | N/A | N/A | 080083850181 | N/A |

Complete downlight includes: Housing + LED Module + Reflector.

HC6 Downlight Series DOWNLIGHT

- 6-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|---------------|----------------------------|-----------------------|-------|----------|-----------|------------------------------|--------------|----------------|
| HC610D010 | 6" Housing | Raw Finish | 75W INC, 18-26W CFL | N/A | 120-227V | 1,000 | 10.W at 120V, 10.9W at 277V | 080083883646 | 2340539 |
| HC615D010 | 6" Housing | Raw Finish | 100W INC, 26-32W CFL | N/A | 120-227V | 1,500 | 14.2W at 120V, 14.9W at 277V | 080083883660 | 2340646 |
| HC620D010 | 6" Housing | Raw Finish | 150W INC, 32W-42W CFL | N/A | 120-227V | 2,000 | 21.1W at 120V, 21.4W at 277V | 080083883684 | 2340647 |
| HM60525835 | 6" LED Module | White | N/A | 3500K | 120-227V | 500-2,500 | N/A | 080083214662 | N/A |
| 61MDH | 6" Reflector | Semi-Specular Clear (Haze) | N/A | N/A | N/A | N/A | N/A | 080083850983 | N/A |

Complete downlight includes: Housing + LED Module + Reflector.

HC8 Downlight Series DOWNLIGHT

- 8-inch LED self-flanged, deep regressed lens downlight
- New construction boat-shaped frame converts to remodeler
- Lumens: 1,000, 1,500, 2,000
- Color temperature: 3500K; 80 CRI
- Medium distribution reflector



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | Energy Star ID |
|----------------|---------------|----------------------------|-----------------------|-------|----------|-----------|------------------------------|--------------|----------------|
| HC810D010 | 8" Housing | Raw Finish | 75W INC, 18-26W CFL | N/A | 120-227V | 1,000 | 10.W at 120V, 10.9W at 277V | 080083216062 | 2470933 |
| HC815D010 | 8" Housing | Raw Finish | 100W INC, 26-32W CFL | N/A | 120-227V | 1,500 | 14.2W at 120V, 14.9W at 277V | 080083907861 | 2351453 |
| HC820D010 | 8" Housing | Raw Finish | 150W INC, 32W-42W CFL | N/A | 120-227V | 2,000 | 21.1W at 120V, 21.4W at 277V | 080083907908 | 2351457 |
| HM80520835 | 8" LED Module | White | N/A | 3500K | 120-227V | 500-2,000 | N/A | 080083216468 | 2351454 |
| 81MDH | 8" Reflector | Semi-Specular Clear (Haze) | N/A | N/A | N/A | N/A | N/A | 080083909902 | N/A |

Complete downlight includes: Housing + LED Module + Reflector.

