

SLSTP Series STRIP LIGHT

- LED strip light with decorative end caps and toolless lens removal
- Suitable for either single or continuous row application
- 3 Color Field-Selectable in 35/40/5000K and dedicated in 4000K
- Field-Selectable lumens 2,400 - 11,200 or dedicated up to 9300
- Impact resistant polycarbonate lens reduces maintenance



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
4SLSTP404DD-UNV	4' Single Lens	2-T8 32W, 1-T5HO 54W	3500K-5000K	120/277V	2,400-6,000	18-46	080083174416	S-OICHU8
8SLSTP804DD-UNV	8' Single Lens	4-T8 32W, 2-T12 75W	3500K-5000K	120/277V	4,300-11,200	33-85	080083174423	S-7SKGJW

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4SLSTP4040DD-UNV	4' Single Lens	2-T8 32W, 1-T5HO 54W	4000K	120/277V	4,927	41	080083705825	PXZQGN9C
8SLSTP8040DD-UNV	8' Single Lens	4-T8 32W, 2-T12 75W	4000K	120/277V	9,304	79	080083814787	P0K8WFD1

Sensor Kits

Catalog Number	Description	PIR Sensor	UPC
SLSTP MS00 KIT	SLSTP Field Installable Sensor KIT	100% / 50% / OFF	080083254200
SLSTP MS25 KIT	SLSTP Field Installable Sensor KIT	100% / 50% / Low (~30%)	080083254224

SNX Series STRIP LIGHT

- Contemporary single frosted radial lens LED strip light
- Replaces two or four lamp fluorescents up to 150W
- 3 Color Field-Selectable in 35/40/5000K and dedicated in 4000K
- 3 Field-Selectable lumens: Low, Medium or High settings
- Single or continuous row via surface or suspended mount



Selectable CCT & Lumens

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
4SNX-SL3-LW-UNV-CC83-CD1-U	4' Single Lens	2-T8 32W, 1-T5HO 54W	3500K-5000K	120-277V	2,000-6,100	17-51	080083265107	S-Z5CGBY
8TSNX-SL3-LW-UNV-CC83-CD2-U	8' Single Lens	4-T8 32W, 2-T12 75W	3500K-5000K	120-277V	4,100-12,000	34-101	080083265114	S-V503E2

Dedicated CCT & Lumens

Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4SNX-45SL-LW-UNV-L840-CD1-U	4' Single Lens	2-T8 32W	4000K	120-277V	4,300	30	080083277605	S-CSWH9R
8TSNX-82SL-LW-UNV-L840-CD1-U	8' Single Lens	4-T8 32W	4000K	120-277V	7,700	53	080083277612	S-825EGL

ST Series STRIP LIGHT

- Full-length LED strip light ideal for replacing fluorescent strips
- Superior performance with lumens up to 9,200 and 115 lumens per watt
- 3 Color Field-Selectable in 35/40/5000K
- Continuous row mount aligner included to add-on length as needed
- Low voltage 0-10V dimming to 10%



Dimming and Selectable CCT

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
2ST2L20SC3	2' Dual Lens, Dimming	2-T8 17W	3500K-5000K	120-277V	2,258	19	080083241569	S-UQO28D
4ST2L40SC3	4' Dual Lens, Dimming	2-T8 32W, 1-T5HO 54W	3500K-5000K	120-277V	4,653	40	080083241583	S-TSP41D
8ST2L80SC3	8' Dual Lens, Dimming	4-T8 32W, 2-T12 75W	3500K-5000K	120-277V	9,060	78	080083242207	S-5J2ZA0

Achieva™ Surface WRAP

- Ideal for replacing up to four lamp and low-bay linear fluorescents
- 3 Color Field-Selectable in 35/40/5000K, Field-Selectable lumens: 2,250 - 12,500
- Designed for single or continuous row mount
- Suitable for ceiling, wall, or suspension mounting



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
2AWS-L3C3-UNV	2' Narrow Modern Wrap, Dimming	2-T8 17W	3500K-5000K	120-277V	2,250-3,084	18/21/25	080083281244	Pending
4AWS-L3C3-UNV	4' Narrow Modern Wrap, Dimming	2-T8 32W	3500K-5000K	120-277V	4,095-5,916	31/38/46	080083281602	Pending
8AWS-L3C3-UNV	8' Narrow Modern Wrap, Dimming	2-T8 96W, 4-T8 32W	3500K-5000K	120-277V	7,845-12,019	54/71/83	080083281800	Pending
2AWS-L3C3-UNV	2' Wide Modern Wrap, Dimming	3-T8 17W	3500K-5000K	120-277V	2,313-3,170	18/21/25	080083281541	Pending
4AWS-L3C3-UNV	4' Wide Modern Wrap, Dimming	3-T8 32W	3500K-5000K	120-277V	4,254-6,013	31/38/47	080083281701	Pending
8AWS-L3C3-UNV	8' Wide Modern Wrap, Dimming	3-T8 96W, 6-T8 32W	3500K-5000K	120-277V	8,296-12,554	57/74/85	080083281909	Pending

NWS Series

WRAP

- Ideal for replacing two or three lamp fluorescents up to 96W
- 3 Color Field-Selectable in 35/40/5000K
- Field-Selectable lumens: 2,000 - 5,272
- Surface (wall or ceiling) mount via junction box or direct to surface, UNV 0-10V dimming to 10%



Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	DLC Product ID
2NWS3C3-UNV	2' Wrap, Dimming	2-T8 17W	3500K-5000K	120-277V	2,009-2,679	15/18/21	080083257485	S-PKU0E2
4NWS3C3-UNV	4' Wrap, Dimming	3-T8 32W	3500K-5000K	120-277V	3,300-4,800	28/32/39	080083257522	S-YJTA0N
4NWS3C3MS-UNV	4' Wrap, Dimming, Sensor *	3-T8 32W	3500K-5000K	120-277V	3,675-5,016	28/32/38	080083257607	S-2V0NL5

* Includes integrated microwave motion sensor (MS) option.

WP Series

WRAP

- Compact LED wrap light delivers value and energy savings
- Perfect retrofit solution for replacing single or 2-lamp fluorescent wraparounds
- Low-profile, highly versatile design; Post-painted die-formed channel
- Prismatic lens ensures even, glare-free light distribution



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	Energy Star ID
4WP3040R	4' Utility Wrap	2-T8 32W	4000K	120-277V	4010	34	080083847167	2326235

WNLED Series

WRAP

- Utility commercial LED linear wrap
- Single or continuous row applications
- Frosted lens offers best-in-class uniform illumination
- Minimizes maintenance common with traditional fluorescents



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC	DLC Product ID
4WNLED-LD4-40SL-F-UNV-L840-CD1-U	4' Linear Wrap	2-T12, 2-T8 32W	4000K	120/277V	4,006	30	080083756889	PK3W95DW




Simple. Secure. Scalable.

WaveLinx LITE is your out-of-the-box functionality app based smart digital lighting system that helps you save energy and manage your site lighting designed for applications that require:

- Standalone/Grouped Occupancy Sensing
- Manual/Personal Dimming Control
- Daylighting


WaveLinx LITE product categories:

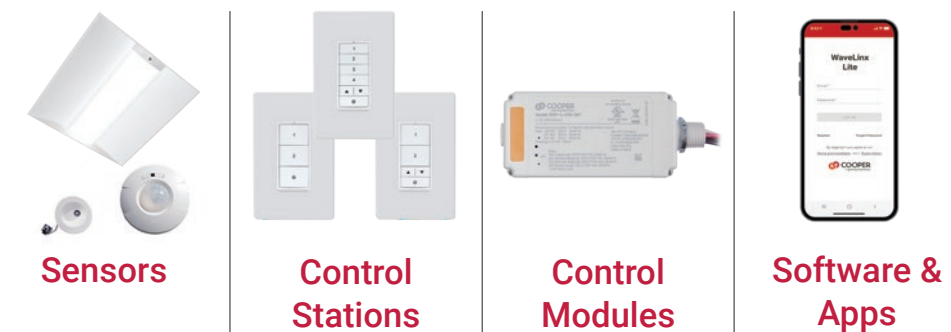

A secure mobile application provides the ability to customize installations for office, education, warehouse, and parking garage applications.



SCAN for more WaveLinx LITE information

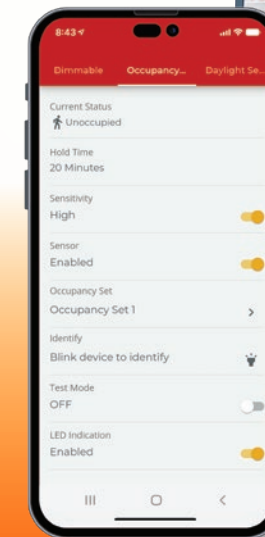

WaveLinx LITE app for standalone spaces with wireless devices

Communicates with the LITE devices directly using the mobile device Bluetooth radio.



ARCHITECTURAL



Corelite
p. 51



iO
p. 51

ARCHITECTURAL COMMERCIAL LIGHTING

iO and Corelite delight architects by offering simple designs that create comfort with a perfect balance of beautiful aesthetics, superior performance and ease of installation.

Perceive Recessed Architectural Series CORELITE

- 3D optical pattern adds dimension and visual interest on a smooth flat surface
- Low-glare solution for increased comfort level
- Extruded aluminum bezel for enhanced durability and clean finished look
- Bottom surface can be wiped down for easy cleaning and maintenance
- Ideal solution for office spaces, schools, and healthcare facilities



Catalog Number	Description	Replaces Up To	CCT	Voltage	Lumens	Watts	UPC
22PT-35-PB1-L835-U	2'x2' Troffer	3-T8, 4-T8, 2-T5HO	3500K	120-277V	3,500	27	080083253906
22PT-35-PB1-L840-U	2'x2' Troffer	3-T8, 4-T8, 2-T5HO	4000K	120-277V	3,500	29	080083253913
24PT-45-PB1-L835-U	2'x4' Troffer	2-T8, 3-T8	3500K	120-277V	4,500	37	080083253920
24PT-45-PB1-L840-U	2'x4' Troffer	2-T8, 3-T8	4000K	120-277V	4,500	37	080083253937

CovSelect Architectural Cove Light iO

- Cove lighting fixture with integral driver for interior applications
- Field-Selectable CCTs: 2700K, 3000K, 3500K, 4000K; 80 CRI
- Field-Selectable lumen output: 350 lumens/ft and 700 lumens/ft
- Up to 200 ft run from a single power drop
- Rated for interior / damp installations
- Simplifies install by eliminating remote drivers and field assembly needed for tape light



No QS prefix needed for stock or Quick Ship orders

Catalog Number	Description	Replaces Up To	Selectable CCT	Voltage	Selectable Lumens	Watts	UPC	Energy Star ID
CS-SL-8SCT-120-ID-UNV-W-SA-STD-4F	4' Linear Fixture	32W T8, 40W T12	2700K-4000K	120-277V	350 lm/ft, 700 lm/ft	21	080083267095	2401210
CS-SL-8SCT-120-ID-UNV-W-SA-STD-1F	1' Linear Fixture	32W T8, 40W T13	2700K-4000K	120-277V	350 lm/ft, 700 lm/ft	6	080083267507	2401209

Power Harness/Control Modules (1 required for each power drop)

Catalog Number	Description	UPC
CS-10V-STD	Standard Power Harness	080083267088

Accessories (optional)

Catalog Number	Description	UPC
CS-JHARN02-006	6" Jumper accessory	080083267071
CS-JHARN02-012	12" Jumper accessory	080083267064
CS-JHARN02-036	36" Jumper accessory	080083267057
CS-JHARN02-144	144" Jumper accessory	080083267040