


TALONX II/2 TX02

STANDARD	NIJ 0101.06
NIJ MODEL	GPMII2-4
SERIES	TX02
BALLISTIC THREAT LEVEL	II
STAB THREAT LEVEL	SPIKE 2
GENDER	Neutral
AREAL DENSITY	1.1 psf
THINNESS	0.34"
PLY COUNT	36
SIZE RANGE	C1-C5
COMPOSITION	Kevlar® Correctional/ Kevlar® KM2+™ Hybrid
STITCHING	Diamond Quilt, Top Stitch
BALLISTIC PACKAGE	200 denier Nylon Cover, Polyurethane Backed, Ultra-Sonic Welded Seams
DESICCANT	Patented Internal Material
WARRANTY	5 Years

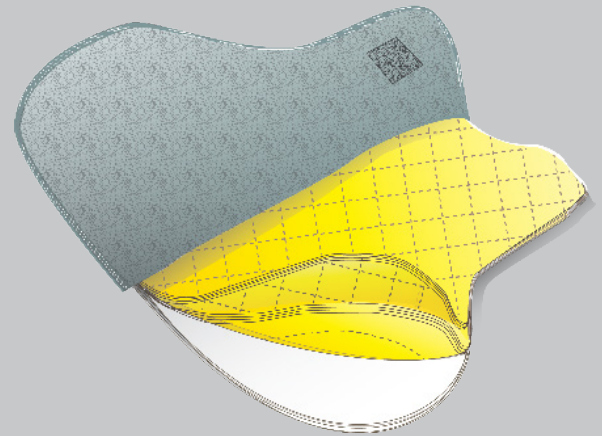

BALLISTIC PERFORMANCE AT CERTIFICATION

9mm New V50	1618 ft/s	.357 Mag New V50	1574 ft/s
9mm Conditioned V50	1624 ft/s	.357 Mag Conditioned V50	1542 ft/s
9mm BFS	27.7 mm	.357 Mag BFS	31.3 mm
9mm New RPI	1470.9	.357 Mag New RPI	1430.9
9mm Conditioned RPI	1476.4	.357 Mag Conditioned RPI	1401.8

SPIKE RESISTANCE RATING

Protection Threat	Level 2	Energy Level 1 (E1)	24.3 ft-lbs/33 J
Protection Class	Spike	Energy Level 2 (E2)	36.9 ft-lbs/50 J

WARNING: This product is not intended to protect the wearer from commercially-made edged weapons or rifle fire.

Information contained in this document is subject to material tolerances and test facility conditions. Specifications and/or products shown are subject to change without notice and may differ from the illustrative depictions. Full technical details / specifications are available upon request.

PACSAFETY.COM

CustomerCare.PSP@Safariland.com | Toll Free: 1-888-997-9923

SAFARILAND®