A Landmark-Aware Visual Navigation Dataset

Faith Johnson* faith.johnson@rutgers.edu Rutgers University New Brunswick, NJ, USA Bryan Bo Cao* boccao@cs.stonybrook.edu Stony Brook University Stony Brook, NY, USA

Shubham Jain jain@cs.stonybrook.edu Stony Brook University Stony Brook, NY, USA Kristin Dana kristin.dana@rutgers.edu Rutgers University New Brunswick, NJ, USA

Ashwin Ashok aashok@gsu.edu Georgia State University New Brunswick, NJ, USA

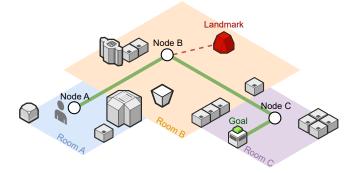


Figure 1: We propose a novel Landmark-Aware Visual Navigation (LAVN) dataset for map representation research. LAVN provides unique landmark information (in red) in specific scenes to aid model navigation and exploration performance and map representation learning. In this figure, a human expert in Room A (in blue) provides a video-based training trajectory (in green lines) for navigation given a goal image (green box). Rooms are depicted in different colors and represented with nodes. Our dataset facilitates topological map representation learning by injecting novel landmarks into a robot's observation.

and tasked with finding and reaching it in the environment. The success of state of the art (SOTA) methods at this task comes down to an agent's ability to efficiently explore its environment. Several works focus on explicitly learning optimal exploration policies [8–10, 41], but this is not the case for the majority of SOTA methods. They either abstract exploration out of the problem all together by assuming that the environment has been seen by the agent prior to test time [23], assume that their networks will implicitly learn an adequate exploration strategy from the data due to the specific task structure [22], or explicitly define the exploration strategy for the agent by hard coding it into the architecture [17].

Of those methods that learn to explore, several niches have arisen such as adding an exploration term to RL reward functions with [41] and without [12] behavioral cloning, building metric maps or graphs with [8] and without [11] semantics, and learning to propose exploration waypoints that provide helpful subgoals during navigation for local policies [10]. These methods suffer from similar downsides as those mentioned previously with the added potential for also requiring full ground truth semantic labels of an environment, which can be extremely costly to acquire. Instead, a much

ABSTRACT

Map representation learned by expert demonstrations has shown promising research value. However, recent advancements in the visual navigation field face challenges due to the lack of human datasets in the real world for efficient supervised representation learning of the environments. We present a Landmark-Aware Visual Navigation (LAVN) dataset to allow for supervised learning of human-centric exploration policies and map building. We collect RGB observation and human point-click pairs as a human annotator explores virtual and real-world environments with the goal of full coverage exploration of the space. The human annotators also provide distinct landmark examples along each trajectory, which we intuit will simplify the task of map or graph building and localization. These human point-clicks serve as direct supervision for waypoint prediction when learning to explore in environments. Our dataset covers a wide spectrum of scenes, including rooms in indoor environments, as well as walkways outdoors. Dataset is available at DOI: 10.5281/zenodo.10608067.

CCS CONCEPTS

• Information systems → Multimedia databases; • Computing methodologies → Machine learning; • Human-centered computing → Interactive systems and tools.

KEYWORDS

Human-in-the-Loop, Visual Navigation, Map Representation, Graph Representatin, Dataset

1 INTRODUCTION

Robotic navigation remains a research problem of interest as advances in AI make mobile intelligent agents, such as delivery bots, more feasible. Many approaches have been proposed from SLAM [5, 24, 25], to graph-based methods [3, 4, 18, 21], to reinforcement learning (RL) [43] to enable robots to effectively move around a space in a goal-oriented manner. However, these methods suffer from high computational complexity, high memory usage, and low sample efficiency respectively. Visual navigation [17, 23, 26] methods circumvent several of these challenges by using neural networks to implicitly learn scene geometry and an optimal navigation policy without necessitating direct environment interaction.

Typically, visual navigation methods are evaluated with the image goal task, where an agent is given a goal image of some target

^{*}Both authors contributed equally to this work.

Dataset	Human Trajectory Demonstrations	Sim	Real	VQA	Large Scale	Semantics	Landmarks
Habitat-Web [27]		1	X	X	1	X	×
RUGD [39]	1	X	1	×	×	1	×
RealEstate20k [42]	1	X	1	X	×	×	×
EmbodiedQA [15]	1	1	×	1	×	×	×
LAVN (Ours)	1	1	1	×	×	X	1

Table 1: Summary of dataset characteristics for visual navigation. Different from existing datasets, LAVN provides video-based trajectories guided by humans in both simulated and real-world scenarios. We are the only dataset to provide labels for helpful navigational landmarks. These landmarks introduce little overhead to an agent's learning scheme, as they do not necessitate the interpretation of the additional text modality as in VQA, or heavy semantic understanding of the environment. We are also the only dataset to provide human trajectory demonstrations in both real world and simulated environments. While we do not provide millions of data points, we allow for supervised model training, which removes the need for copious amounts of data.

simpler approach would be to explicitly learn good exploration techniques in a human-centric manner. Learning human-centric exploration strategies in a supervised manner would allow for much simpler networks to effectively solve navigation problems, thus reducing the computational complexity, high memory usage, and low sample efficiency issues of SOTA. However, there is very limited data that would allow for this kind of learning.

In this work, we present a Landmark-Aware Visual Navigation (LAVN) dataset¹ of human-guided environment exploration videos collected from the photo-realistic Habitat virtual environment as well as several real world environments. We collect RGBD image observations and human point click pairs as a human guides an agent in exploring each environment. These point clicks represent subgoals that guide the agent incrementally though the space and can be used for supervised learning of human-centric waypoints for environment exploration. Additionally, we expect that having landmarks when exploring has the potential to improve current SOTA performance on map-building and localization tasks inherent in navigation. To this end, the human annotator also provides examples for helpful navigation landmarks, which also allows for supervised training of landmark prediction networks. In this way, it becomes possible to directly train a network to explore an environment in a human-centric manner under multiple SOTA paradigms.

This paper is organized as follows: we summarize our dataset's key differences from existing works in Section 2. Then, we present the details of data acquisition in both the virtual (Section 3) and realworld (Section 4) environments. The details of the dataset format will be described in Section 5. We conclude our work in Section 6.

2 RELATED WORK

2.1 Map Representation for Navigation

The success of navigation relies on an effective learning and understanding of the environment. Two main approaches for this are map representation learning in geometry-based [5, 24, 25] and learningbased [9, 23, 31, 37, 43] categories. However, the former requires careful and robust hand-engineered feature design and requires intensive computation (e.g. keyframes in SLAM). The advancements of Deep RL in the second category are partially attributed to the emergence of simulators designed for photorealistic simulation, including Habitat AI [29, 35] with datasets Gibson [40] and Matterport [7]. While these simulators enable large scale model training, they are also expensive to build, can run slowly enough to mitigate their ability to produce large numbers of training samples, and introduce the sim2real problem when deploying models in the real world. To combat this, methods like NRNS [17] demonstrate the effectiveness of using expert videos to train robots without interacting with environments.

2.2 Human-Robot Interaction Datasets

There is a large body of datasets or benchmarks for Human-Robot Interaction, ranging from industrial [19] to social [2, 13, 16, 20, 28, 30, 34, 38] environments. As one of the fundamental tasks for robots, researchers have collected datasets for learning visual navigation with socially compliant behaviors [2, 13, 16, 20, 28, 30, 34]. Apart from learning from other robots collectively [32], robotic visual navigation can benefit from human feedback via visual cues [39], language [36], gesture [6], multimodal instructions [30, 33], or demonstrations [27].

Our work extends the line of efficient map representation using topological graphs [18, 21]. Similar to how a human [14] can quickly learn to navigate in a new environment by implicitly treating landmarks as nodes in their mental graph [14], we hypothesize that a robot can acquire the ability to navigate in novel places efficiently by intelligently injecting landmarks into its own topological graph. However, little attention has been paid to such datasets, resulting in **a lack of data** that includes **landmark** information for this research in the literature. Our dataset hereby aims to fill this gap by providing a series of human-expert-annotated video with **landmarks** both in virtual and **real-world** datasets, including indoor and outdoor scenes. We summarize the key characteristics of recent datasets in Table 1.

3 VIRTUAL DATASET

The main objective of the data collection is to provide human navigation demonstrations for robots in a real-world environment. As video has been proven to be an effective way to teach robots to accomplish different tasks [17], we hereby collect trajectories in video format. Below, we detail the process of data collection for the virtual dataset.

¹Dataset is available at https://zenodo.org/records/10608067.

A Landmark-Aware Visual Navigation Dataset



Figure 2: Samples of RGB images in our dataset captured from an ego-centric camera. Video frames start from left to right. Landmarks are visualized with red dots. Samples in the virtual dataset (1st and 2nd rows in blue) are visually realistic compared to the real-world observations (3rd and 4th rows in green), which makes landmark data acquisition scalable to serve real-world research purposes.

3.1 Environments

We provide human-click annotations for a selection of the Matterport [7] and Gibson environments [40] in Habitat-Sim [29, 35] to facilitate virtual environment exploration. We provide a full list of annotated environments with the data. Habitat is already used to train many visual navigation methods, so having in-domain, landmark-aware data will allow for direct extensions of these methods for greater ease of model comparison. Additionally, it allows for greater data collection volume and lower data processing time.

3.2 Data Collection and Representation

To start, the human navigator is placed at a random, navigable point in an environment, and tasked with visiting as many rooms as possible while identifying distinct landmarks in each room. The current first person observation of the environment is shown on a screen, and the human moves through the environment by left clicking on this image towards the direction they would like to move. There are three discrete action choices for moving around in the environment: moving forward 0.25m, turning left 15° , and turning right 15° . To specify a landmark, the navigator right clicks on the observation image over the object or region of space they choose. We provide a human point-click supervisory signal for each time step of the trajectory, but these signals could easily be masked to generate data to train temporally abstracted waypoint predictors.

A graph is built as the navigator moves through the space, where nodes are added each time an action is taken. Each node contains one RGB observation, one depth image, the human navigational point click, and the ground truth odometry (including ground truth location and orientation). Edges are drawn between consecutive nodes only, however it is possible to do loop closure on the graph using the odometry provided. Each graph also contains a sequential list of the actions taken to move through the environment. A list of pairs of landmark point-click image coordinates paired and their corresponding nodes is also provided in the graph so that landmarks may be easily identified in the scene. Each human-guided trajectory is terminated after 500 actions or when the annotator has navigated through the entirety of the space, whichever comes first.

4 REAL WORLD DATASET

In this section, we detail the process of data collection for the real-world dataset. We aim to make the data collection and representation steps between the virtual and real-world datasets as similar as possible.

4.1 Environments

Real-world data is recorded in a broad spectrum of environments. Indoor scenes include laboratories and hallways inside a building, while outdoor environments contain avenues, walkways, and campus buildings with different architectures. A wide range of trajectories with various complexities are captured in both regular shapes such as rectangles in corridors inside a building, as well as irregular shapes on roads surrounded by trees or near a lake. Objects in common environments are included, ranging from chairs, desks, doors, and computers in indoor rooms, to trees, lakes, stones, bikes, bricks and so forth in open spaces outside a building.



Figure 3: Samples of RGB images in the real world environments with landmarks annotated by red dots. Trajectories are recorded in comprehensive environments both indoors and outdoors.

4.2 Data Collection and Representation

In order to collect consistent data between the real-world data and simulation, our human annotator is asked to follow the same protocol as they did in the virtual environment described in Section 3.2. During navigation, the annotator holds a camera (iPhone13Mini [1]'s built-in camera) naturally around 1.5m high off the ground facing forwards. Unlike in simulation where agents can move with exact distances or turning angles, real-world environments require that each action taken by the human navigator is inherently inexact. Therefore, the navigator is instructed to follow the same discrete action choices by its own judgement. Specifically, the expert takes a picture (saved in JPEG) in every step with around 0.7 meters, or in every left or right turn in roughly 15°. This also presents real-world data with complex noise or perturbations. Trajectories are recorded in ten diverse scenes in both indoor and outdoor environments shown in Fig. 3.

Resolution in the original images was 4032x3024. To promote consistency between the virtual and real-world data, the images are resized to be the same resolution of 640x480 as in the simulation and saved in JPEG format with quality 85%. Landmarks are annotated offline after the videos are saved. Samples from our dataset are visualized in Fig. 2. Both virtual and real-world images are photorealistic and can benefit downstream research in the real world. Our proposed dataset provides a unique benchmark for both learning and evaluation to serve the visual navigation community. Our dataset statistics are summarized in Table 2.

Dataset	#Traj.	Tot. #Frames	Tot. #Landmarks		#Real World Envs
LAVN	310	103,998	14,281	300	10

Table 2: Statistics of our dataset. We detail the number of trajectories, total number of frames per trajectory, landmarks, virtual environments, and real world environments included in the data.

5 FILE FORMATTING

For both datasets, the graph created during navigation is saved as a json file containing edge, action, odometry, point-click, and image path information for each node. The RGB observation and depth images for the virtual dataset are saved as png's of size 480x640. For the real world dataset, the RGB observations and depth images are saved as jpg's of the same size.

The overall file structure of the dataset is separated into different folders for the virtual and realworld datasets. Within the virtual dataset folder, there are different folders for the Gibson and Matterport data, where each trajectory has it's own folder within one of these and is labeled with it's environment name. We provide tools for video playback, reading in the graphs, and processing the images with the data.

6 CONCLUSION

In this work, we introduce a the first Landmark-Aware Visual Navigation (LAVN) dataset with human point-click annotations, providing exploration waypoint and environment landmark labels that allow for supervised training for exploration and map building tasks. We provide trajectories in 300 virtual and real-world environments with RGB observations, depth images, odometry, and human point-clicks for navigation waypoint supervision and environment landmark supervision. With this dataset, it will be possible to create visual navigation models that exhibit human-centric exploration policies to improve model performance on the image-goal task, paving the way for autonomous embodied agents in real-world applications. A Landmark-Aware Visual Navigation Dataset

REFERENCES

- 2021. iPhone. 13 Mini. https://www.apple.com/shop/buy-iphone/iphone-13 Apple.
- [2] Bani Anvari and Helge A Wurdemann. 2020. Modelling social interaction between humans and service robots in large public spaces. In 2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS). IEEE, 11189–11196.
- [3] Hriday Bavle, Jose Luis Sanchez-Lopez, Javier Civera, and Holger Voos. 2023. Faster Optimization in S-Graphs Exploiting Hierarchy. arXiv preprint arXiv:2308.11242 (2023).
- [4] Hriday Bavle, Jose Luis Sanchez-Lopez, Muhammad Shaheer, Javier Civera, and Holger Voos. 2022. S-graphs+: Real-time localization and mapping leveraging hierarchical representations. arXiv preprint arXiv:2212.11770 (2022).
- [5] Carlos Campos, Richard Elvira, Juan J Gómez Rodríguez, José MM Montiel, and Juan D Tardós. 2021. Orb-slam3: An accurate open-source library for visual, visual-inertial, and multimap slam. *IEEE Transactions on Robotics* 37, 6 (2021), 1874–1890.
- [6] Bo Cao. 2018. DiffFrameNet: A Deep Learning Method for Intuitive Robot Navigation. Ph. D. Dissertation. University of Colorado at Boulder.
- [7] Angel Chang, Angela Dai, Thomas Funkhouser, Maciej Halber, Matthias Niessner, Manolis Savva, Shuran Song, Andy Zeng, and Yinda Zhang. 2017. Matterport3D: Learning from RGB-D Data in Indoor Environments. *International Conference on* 3D Vision (3DV) (2017).
- [8] Devendra Singh Chaplot, Murtaza Dalal, Saurabh Gupta, Jitendra Malik, and Russ R Salakhutdinov. 2021. Seal: Self-supervised embodied active learning using exploration and 3d consistency. Advances in neural information processing systems 34 (2021), 13086–13098.
- [9] Devendra Singh Chaplot, Dhiraj Gandhi, Saurabh Gupta, Abhinav Gupta, and Ruslan Salakhutdinov. 2020. Learning to explore using active neural slam. arXiv preprint arXiv:2004.05155 (2020).
- [10] Devendra Singh Chaplot, Dhiraj Prakashchand Gandhi, Abhinav Gupta, and Russ R Salakhutdinov. 2020. Object goal navigation using goal-oriented semantic exploration. Advances in Neural Information Processing Systems 33 (2020), 4247– 4258.
- [11] Devendra Singh Chaplot, Ruslan Salakhutdinov, Abhinav Gupta, and Saurabh Gupta. 2020. Neural topological slam for visual navigation. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 12875–12884.
- [12] Tao Chen, Saurabh Gupta, and Abhinav Gupta. 2019. Learning exploration policies for navigation. arXiv preprint arXiv:1903.01959 (2019).
- [13] Yuhao Chen, Yue Luo, Chizhao Yang, Mustafa Ozkan Yerebakan, Shuai Hao, Nicolas Grimaldi, Song Li, Read Hayes, and Boyi Hu. 2022. Human mobile robot interaction in the retail environment. *Scientific Data* 9, 1 (2022), 673.
- [14] Elizabeth R Chrastil and William H Warren. 2014. From cognitive maps to cognitive graphs. *PloS one* 9, 11 (2014), e112544.
- [15] Abhishek Das, Samyak Datta, Georgia Gkioxari, Stefan Lee, Devi Parikh, and Dhruv Batra. 2018. Embodied question answering. In *Proceedings of the IEEE* conference on computer vision and pattern recognition. 1–10.
- [16] Alex Day and Ioannis Karamouzas. 2023. A Study in Zucker: Insights on Human-Robot Interactions. arXiv preprint arXiv:2307.08668 (2023).
- [17] Meera Hahn, Devendra Chaplot, Shubham Tulsiani, Mustafa Mukadam, James Rehg, and Abhinav Gupta. 2021. No RL, No Simulation: Learning to Navigate without Navigating. (2021).
- [18] Yuhang He, Irving Fang, Yiming Li, Rushi Bhavesh Shah, and Chen Feng. 2023. Metric-Free Exploration for Topological Mapping by Task and Motion Imitation in Feature Space. arXiv preprint arXiv:2303.09192 (2023).
- [19] Francesco Iodice, Elena De Momi, and Arash Ajoudani. 2022. Hri30: An action recognition dataset for industrial human-robot interaction. In 2022 26th International Conference on Pattern Recognition (ICPR). IEEE, 4941–4947.
- [20] Haresh Karnan, Anirudh Nair, Xuesu Xiao, Garrett Warnell, Sⁱⁱoren Pirk, Alexander Toshev, Justin Hart, Joydeep Biswas, and Peter Stone. 2022. Socially compliant navigation dataset (scand): A large-scale dataset of demonstrations for social navigation. *IEEE Robotics and Automation Letters* 7, 4 (2022), 11807–11814.
- [21] Nuri Kim, Obin Kwon, Hwiyeon Yoo, Yunho Choi, Jeongho Park, and Songhwai Oh. 2023. Topological semantic graph memory for image-goal navigation. In *Conference on Robot Learning*. PMLR, 393–402.
- [22] Jacob Krantz, Aaron Gokaslan, Dhruv Batra, Stefan Lee, and Oleksandr Maksymets. 2021. Waypoint models for instruction-guided navigation in continuous environments. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 15162–15171.
- [23] Sacha Morin, Miguel Saavedra-Ruiz, and Liam Paull. 2023. One-4-All: Neural Potential Fields for Embodied Navigation. arXiv preprint arXiv:2303.04011 (2023).
- [24] Raul Mur-Artal, Jose Maria Martinez Montiel, and Juan D Tardos. 2015. ORB-SLAM: a versatile and accurate monocular SLAM system. *IEEE transactions on robotics* 31, 5 (2015), 1147–1163.
- [25] R Mur-Artal and JD Tardos. 2017. ORB-SLAM2: an open-source SLAM system for monocular, stereo and RGB-D cameras (2016). arXiv preprint arXiv:1610.06475 (2017).

- [26] Santhosh Kumar Ramakrishnan, Devendra Singh Chaplot, Ziad Al-Halah, Jitendra Malik, and Kristen Grauman. 2022. Poni: Potential functions for objectgoal navigation with interaction-free learning. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 18890–18900.
- [27] Ram Ramrakhya, Eric Undersander, Dhruv Batra, and Abhishek Das. 2022. Habitat-web: Learning embodied object-search strategies from human demonstrations at scale. In Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition. 5173–5183.
- [28] Andrey Rudenko, Tomasz P Kucner, Chittaranjan S Swaminathan, Ravi T Chadalavada, Kai O Arras, and Achim J Lilienthal. 2020. Th["]or: Human-robot navigation data collection and accurate motion trajectories dataset. *IEEE Robotics* and Automation Letters 5, 2 (2020), 676–682.
- [29] Manolis Savva, Abhishek Kadian, Oleksandr Maksymets, Yili Zhao, Erik Wijmans, Bhavana Jain, Julian Straub, Jia Liu, Vladlen Koltun, Jitendra Malik, Devi Parikh, and Dhruv Batra. 2019. Habitat: A Platform for Embodied AI Research. In Proceedings of the IEEE/CVF International Conference on Computer Vision (ICCV).
- [30] Tim Schreiter, Tiago Rodrigues de Almeida, Yufei Zhu, Eduardo Gutierrez Maestro, Lucas Morillo-Mendez, Andrey Rudenko, Tomasz P Kucner, Oscar Martinez Mozos, Martin Magnusson, Luigi Palmieri, et al. 2022. The magni human motion dataset: Accurate, complex, multi-modal, natural, semantically-rich and contextualized. arXiv preprint arXiv:2208.14925 (2022).
- [31] Dhruv Shah, Benjamin Eysenbach, Gregory Kahn, Nicholas Rhinehart, and Sergey Levine. 2021. Ving: Learning open-world navigation with visual goals. In 2021 IEEE International Conference on Robotics and Automation (ICRA). IEEE, 13215– 13222.
- [32] Dhruv Shah, Ajay Sridhar, Arjun Bhorkar, Noriaki Hirose, and Sergey Levine. 2023. Gnm: A general navigation model to drive any robot. In 2023 IEEE International Conference on Robotics and Automation (ICRA). IEEE, 7226–7233.
- [33] Snehesh Shrestha, Yantian Zha, Ge Gao, Cornelia Fermuller, and Yiannis Aloimonos. 2023. NatSGD: A Dataset with Speech, Gestures, and Demonstrations for Robot Learning in Natural Human-Robot Interaction. (2023).
- [34] Tianmin Shu, Michael S Ryoo, and Song-Chun Zhu. 2016. Learning social affordance for human-robot interaction. arXiv preprint arXiv:1604.03692 (2016).
- [35] Andrew Szot, Alex Clegg, Eric Undersander, Erik Wijmans, Yili Zhao, John Turner, Noah Maestre, Mustafa Mukadam, Devendra Chaplot, Oleksandr Maksymets, Aaron Gokaslan, Vladimir Vondrus, Sameer Dharur, Franziska Meier, Wojciedh Galuba, Angel Chang, Zsolt Kira, Vladlen Koltun, Jitendra Malik, Manolis Savva, and Dhruv Batra. 2021. Habitat 2.0: Training Home Assistants to Rearrange their Habitat. In Advances in Neural Information Processing Systems (NeurIPS).
- [36] Jesse Thomason, Michael Murray, Maya Cakmak, and Luke Zettlemoyer. 2020. Vision-and-dialog navigation. In Conference on Robot Learning. PMLR, 394–406.
- [37] Alexander Sasha Vezhnevets, Simon Osindero, Tom Schaul, Nicolas Heess, Max Jaderberg, David Silver, and Koray Kavukcuoglu. 2017. Feudal networks for hierarchical reinforcement learning. In *International Conference on Machine Learning*. PMLR, 3540–3549.
- [38] Yanming Wan, Jiayuan Mao, and Josh Tenenbaum. 2022. HandMeThat: Human-Robot Communication in Physical and Social Environments. Advances in Neural Information Processing Systems 35 (2022), 12014–12026.
- [39] Maggie Wigness, Sungmin Eum, John G Rogers, David Han, and Heesung Kwon. [n. d.]. A rugd dataset for autonomous navigation and visual perception in unstructured outdoor environments. In 2019 IEEE. In RSJ International Conference on Intelligent Robots and Systems (IROS). 5000–5007.
- [40] Fei Xia, Amir R. Zamir, Zhi-Yang He, Alexander Sax, Jitendra Malik, and Silvio Savarese. 2018. Gibson env: real-world perception for embodied agents. In Computer Vision and Pattern Recognition (CVPR), 2018 IEEE Conference on. IEEE.
- [41] Joel Ye, Dhruv Batra, Abhishek Das, and Erik Wijmans. 2021. Auxiliary tasks and exploration enable objectgoal navigation. In Proceedings of the IEEE/CVF International Conference on Computer Vision. 16117–16126.
- [42] Tinghui Zhou, Richard Tucker, John Flynn, Graham Fyffe, and Noah Snavely. 2018. Stereo magnification: Learning view synthesis using multiplane images. arXiv preprint arXiv:1805.09817 (2018).
- [43] Yuke Zhu, Roozbeh Mottaghi, Eric Kolve, Joseph J Lim, Abhinav Gupta, Li Fei-Fei, and Ali Farhadi. 2017. Target-driven visual navigation in indoor scenes using deep reinforcement learning. In 2017 IEEE international conference on robotics and automation (ICRA). IEEE, 3357–3364.